



R4A3

Product Specifications

EFFICIENT 13 SEER AIR CONDITIONER ENVIRONMENTALLY SOUND R-410A REFRIGERANT

1-1/2 THRU 5 TONS SPLIT SYSTEM

208 / 230 Volt, 1-phase, 60 Hz

REFRIGERATION CIRCUIT

- Scroll compressors on all models
- Copper tube / aluminum fin coil

EASY TO INSTALL AND SERVICE

- Easy Access service valves on all models
- External high and low refrigerant service ports
- Only two screws to access control panel
- Factory charged with R-410A refrigerant

BUILT TO LAST

- Pre-painted cabinet finish over galvanized steel
- Coated inlet grille with 2" (51mm) spacing standard, alternate models available with 3/8" (10mm) grille spacing for extra protection

WARRANTY*

- 5 year compressor limited warranty
- 5 year parts limited warranty (including compressor and coil)
 - With timely registration, an additional 5 year parts limited warranty (including compressor and coil)

* Applies to original purchaser/homeowner, some limitations may apply. See Warranty certificate for complete details.





Use of the AHRI Certified TM Mark indicates a manufacturer's participation in the program. For verification of certification for individual products, go to www.ahridirectory.org.

Model Number	Size (tons)	Nominal BTU/hr	Min. Circuit Ampacity	Max. Fuse or Breaker	Operating Dimensions height x width x depth in. (mm)	Ship / Operating Weight lbs.(kg)
R4A318AKA	1-1/2	18,000	11.7	20	24-13/16 x 23-1/8 x 23-1/8 (630 x 587 x 587)	120 / 104 (54 / 47)
18GKA	same model with 3/8" spacing inlet grille					124 / 108 (56 / 49)
R4A324AKA	2	24,000	17.6	30	24-13/16 x 23-1/8 x 23-1/8 (630 x 587 x 587)	123 / 107 (56 / 49)
24GKA	same model with 3/8" spacing inlet grille					127 / 111 (58 / 50)
R4A330AKA	2-1/2	30,000	16.8	25	28-7/16 x 23-1/8 x 23-1/8 (722 x 587 x 587)	126 / 110 (57 / 50)
30GKA	same model with 3/8" spacing inlet grille					130 / 114 (59 / 52)
R4A336AKA	3	36,000	19.0	30	35-3/16 x 23-1/8 x 23-1/8 (894 x 587 x 587)	139 / 122 (63 / 55)
36GKA	same model with 3/8" spacing inlet grille					144 / 127 (65 / 58)
R4A342AKA	3-1/2	42,000	23.5	40	31-13/16 x 31-3/16 x 31-3/16 (808 x 792 x 792)	187 / 164 (85 / 74)
42GKA	same model with 3/8" spacing inlet grille					195 / 172 (88 / 78)
R4A348AKA	4	48,000	26.2	40	35-3/16 x 31-3/16 x 31-3/16 (894 x 792 x 792)	197 / 173 (89 / 78)
48GKA	same model with 3/8" spacing inlet grille					206 / 181 (93 / 82)
R4A360AKA	5	60,000	34.4	50	28-7/16 x 31-3/16 x 31-3/16 (722 x 792 x 792)	216 / 190 (98 / 86)
60GKA	same model with 3/8" spacing inlet grille					224 / 198 (102 / 90)


OUTDOOR UNIT MODEL NUMBER IDENTIFICATION GUIDE (single phase)											
Digit Position:	1	2	3	4	5, 6	7	8	9	10	11	12
Example Part Number:	R	4	A	3	18	A	K	A	1	0	0
Product Family	REFRIGERANT										
4 = R-410A											
A = Air Conditioner											
H = Heat Pump				TYPE							
3 = 13 SEER											
				NOMINAL EFFICIENCY							
18 = 18,000 BTUH = 1-1/2 tons											
24 = 24,000 BTUH = 2 tons											
30 = 30,000 BTUH = 2-1/2 tons											
36 = 36,000 BTUH = 3 tons											
42 = 42,000 BTUH = 3-1/2 tons											
48 = 48,000 BTUH = 4 tons											
60 = 60,000 BTUH = 5 tons											
				NOMINAL CAPACITY							
A = Standard Grille											
G = Coil Guard Grille										FEATURES	
K = 208/230-1-60										VOLTAGE	
Sales Code											
Engineering Revision											
Extra Digit											
Extra Digit											

ACCESSORIES PART NUMBER IDENTIFICATION GUIDE									
Digit Position:	1	2	3	4	5	6, 7	8, 9	10, 11	
Example Part Number:	N	A	S	A	0	01	01	CH	
N = Non-Branded	BRANDING								
A = Accessory			PRODUCT GROUP						
S = Split System (AC & HP)					KIT USAGE				
A = Original									
B = 2nd Generation							MAJOR SERIES		
0 = Generic or Not Applicable									
2 = R-22									
4 = R-410A									REFRIGERANT
Product Identifier Number									
Package Quantity									
Type of Kit (Example: CH = Crankcase Heater)									

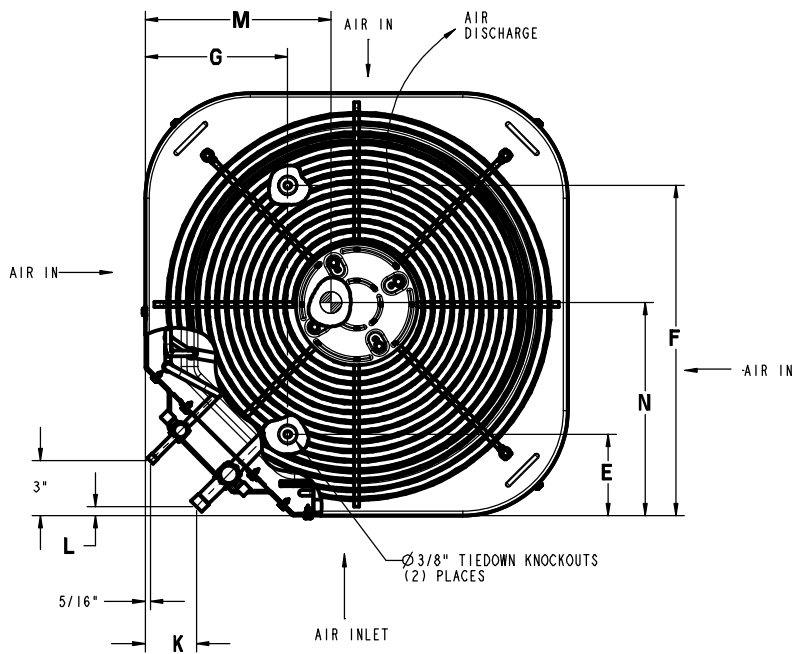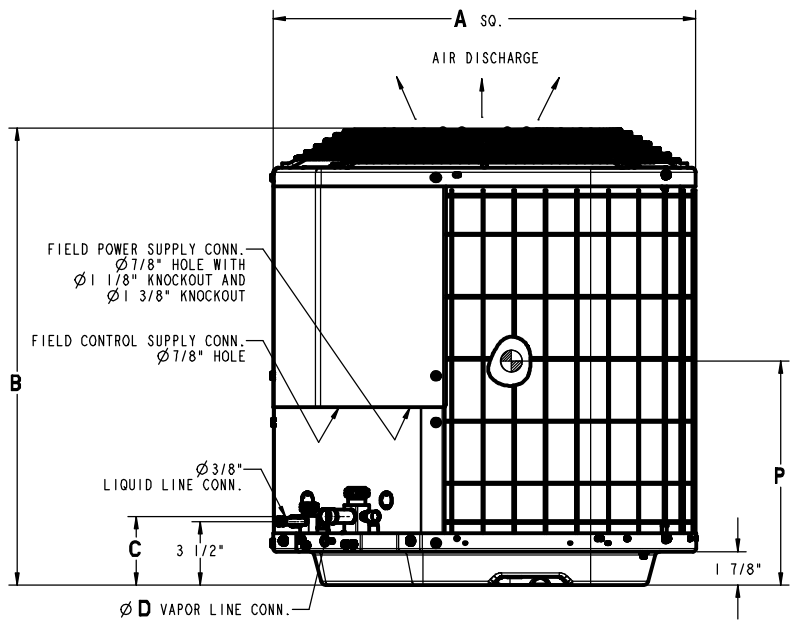

All Dimensions Inches (English)

Model * = A or G	All Dimensions Inches (English)												Minimum Mounting Pad Size	Crated Dimensions height x width x depth
	A	B	C	D	E	F	G	K	L	M	N	P		
R4A318*KA	23-1/8	24-13/16	3-3/4	3/4	4-7/16	18-1/16	7-13/16	2-13/16	1/2	12	11-3/4	11-7/8	23-1/2 X 23-1/2	27-3/16 X 24-1/8 x 24-1/8
R4A324*KA	23-1/8	24-13/16	3-3/4	3/4	4-7/16	18-1/16	7-13/16	2-13/16	1/2	12	11-3/4	11-7/8	23-1/2 X 23-1/2	27-3/16 X 24-1/8 x 24-1/8
R4A330*KA	23-1/8	28-7/16	3-3/4	3/4	4-7/16	18-1/16	7-13/16	2-13/16	1/2	12	11-3/4	12-1/2	23-1/2 X 23-1/2	30-5/8 X 24-1/8 x 24-1/8
R4A336*KA	23-1/8	35-3/16	3-7/8	7/8	6-9/16	18-1/16	7-13/16	2-13/16	1/2	12	11-3/4	13-3/4	23-1/2 X 23-1/2	37-7/16 X 24-1/8 x 24-1/8
R4A342*KA	31-3/16	31-13/16	3-7/8	7/8	6-9/16	24-11/16	9-1/8	2-15/16	5/8	16	15-1/2	13-3/4	31-1/2 X 31-1/2	34 X 32-3/16 x 32-3/16
R4A348*KA	31-3/16	35-3/16	3-7/8	7/8	6-9/16	24-11/16	9-1/8	2-15/16	5/8	16	15-1/2	15-1/2	31-1/2 X 31-1/2	37-7/16x32-3/16 x 32-3/16
R4A360*KA	31-3/16	28-7/16	3-7/8	7/8	6-9/16	24-11/16	9-1/8	2-15/16	5/8	16	15-1/2	12-3/4	31-1/2 X 31-1/2	30-5/8x32-3/16 x 32-3/16

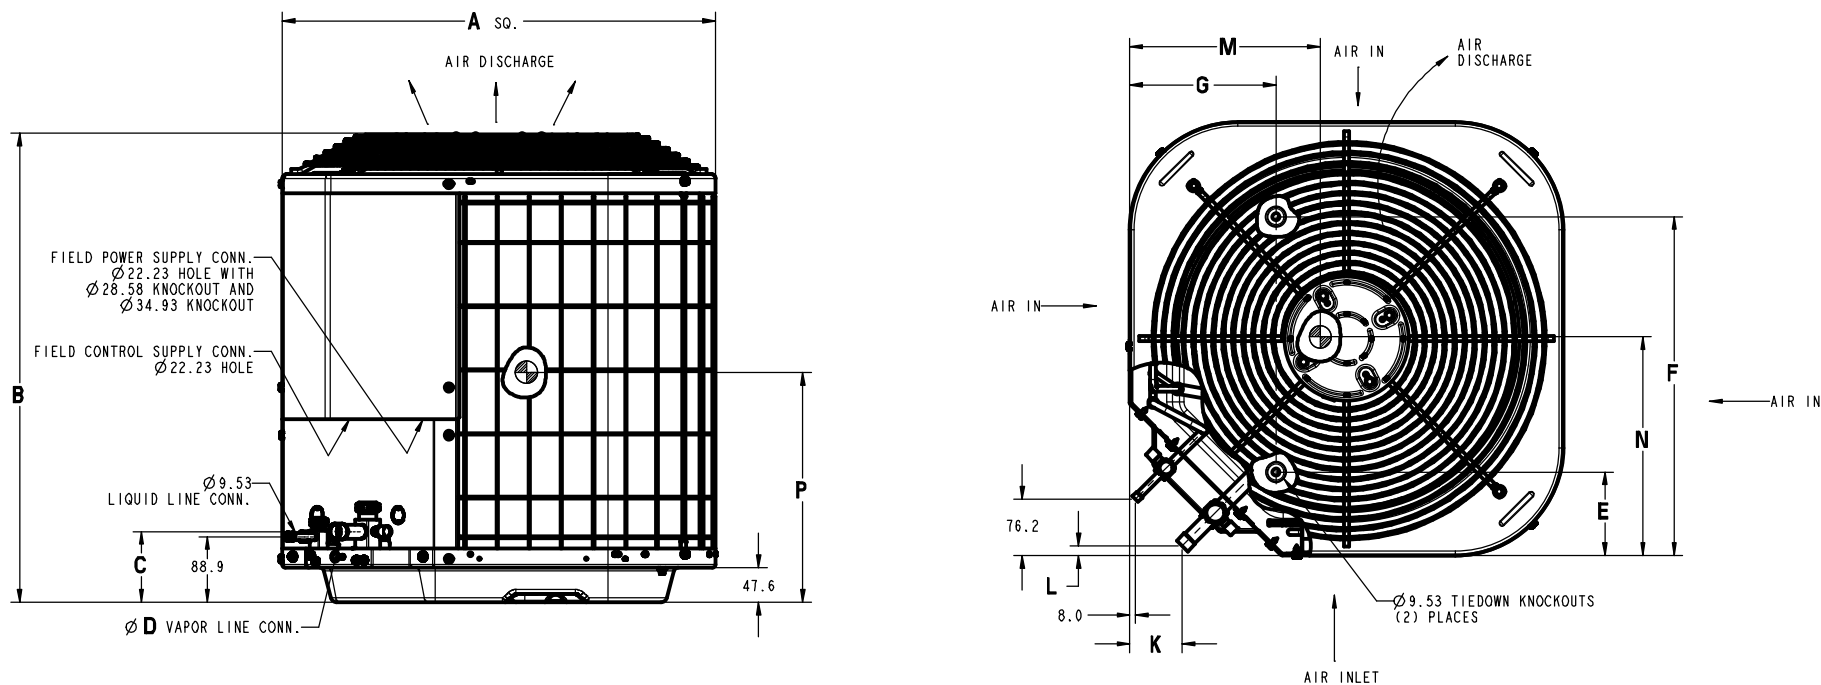

All Dimensions mm (SI Metric)

Model * = A or G	All Dimensions mm (SI Metric)												Minimum Mounting Pad Size	Crated Dimensions height x width x depth
	A	B	C	D	E	F	G	K	L	M	N	P		
R4A318*KA	587	630	95	19	113	459	198	71	13	305	298	302	597 x 597	691 x 613 x 613
R4A324*KA	587	630	95	19	113	459	198	71	13	305	298	302	597 x 597	691 x 613 x 613
R4A330*KA	587	722	95	19	113	459	198	71	13	305	298	318	597 x 597	778 x 613 x 613
R4A336*KA	587	894	98	22	167	459	198	71	13	305	298	349	597 x 597	951 x 613 x 613
R4A342*KA	792	808	98	22	167	627	232	75	16	406	394	349	800 x 800	864 x 818 x 818
R4A348*KA	792	894	98	22	167	627	232	75	16	406	394	394	800 x 800	951 x 818 x 818
R4A360*KA	792	722	98	22	167	627	232	75	16	406	394	324	800 x 800	778 x 818 x 818

PHYSICAL DATA								
Model Size	18	24	30	36	42	48	60	
Nominal Cooling Capacity (BTU/hr)	18,000	24,000	30,000	36,000	42,000	48,000	60,000	
Nominal SEER	13.0	13.0	13.0	13.0	13.0	13.0	13.0	
Sound Rating (dBA)**	76	76	76	77	80	80	80	
PSC Fan Motor HP	1/12	1/10	1/10	1/4	1/5	1/4	1/4	
Fan RPM (single speed)	1100	1100	1100	1100	1100	1100	1100	
Fan CFM	1700	2000	2000	2500	3100	3400	3400	
Coil Face Area ft ² (m ²)	8.40 (.78)	8.40 (.78)	9.80 (.91)	12.60 (1.17)	17.30 (1.61)	19.29 (1.79)	15.00 (1.39)	
Coil Rows – fins per inch	1 – 20	1 – 20	1 – 25	1 – 25	1 – 25	1 – 25	2 – 20	
Liquid Line Connection Size in. (mm)	3/8 (10)	3/8 (10)	3/8 (10)	3/8 (10)	3/8 (10)	3/8 (10)	3/8 (10)	
Vapor Line Connection Size in. (mm)	3/4 (19)	3/4 (19)	3/4 (19)	7/8 (22)	7/8 (22)	7/8 (22)	7/8 (22)	
Recommended Line Set Liquid Tube Diameter in. (mm)	3/8 (10)	3/8 (10)	3/8 (10)	3/8 (10)	3/8 (10)	3/8 (10)	3/8 (10)	
Recommended Line Set Vapor Tube Diameter in. (mm)	3/4 (19)*	3/4 (19)	3/4 (19)*	7/8 (22)*	7/8 (22)*	1-1/8 (29)*	1-1/8 (29)*	
* Recommended Vapor Tube Line size is for standard installations. These recommendations may not apply to “Long Line” installations. When the total equivalent line length exceeds 80 feet (24.4m) or there is more than 20 feet (6.1m) vertical separation between indoor and outdoor units, consult the Long Line Application Guideline document before purchasing/installing line sets.								
Factory Charge R-410A lbs. (kg)	3.15 (1.43)	3.15 (1.43)	3.63 (1.65)	4.67 (2.12)	6.07 (2.75)	7.00 (3.17)	8.00 (3.63)	
Required Subcooling °F (°C)	10 (6)	10 (6)	10 (6)	10 (6)	10 (6)	10 (6)	10 (6)	
Models AKA	Weight, shipping lbs. (kg)	120 (54)	123 (56)	126 (57)	139 (63)	187 (85)	197 (89)	216 (98)
	Weight, operating lbs. (kg)	104 (47)	107 (49)	110 (50)	122 (55)	164 (74)	173 (78)	190 (86)
Models GKA	Weight, shipping lbs. (kg)	124 (56)	127 (58)	130 (59)	144 (65)	195 (88)	206 (93)	224 (102)
	Weight, operating lbs. (kg)	108 (49)	111 (50)	114 (52)	127 (58)	172 (78)	181 (82)	198 (90)

ELECTRICAL DATA (208/230-1-60, voltage range 197V – 253V)							
Model Size	18	24	30	36	42	48	60
Minimum Circuit Ampacity – MCA (amps)	11.7	17.6	16.8	19.0.0	23.5	26.2	34.4
Maximum OverCurrent Protective device – MOCP (amps)	20	30	25	30	40	40	50
Compressor RLA (Rated Load Amps) LRA (Locked Rotor Amps)	9.0 48.0	13.5 58.3	12.8 64.0	14.1 77.0	17.9 112.0	19.9 109.0	26.4 134.0
Fan Motor FLA (Full Load Amps)	.50	.77	.77	1.4	1.1	1.4	1.4

**Sound Rating tested in accordance with ARI Standard 270-95 (not listed with ARI).

R-410A COOLING CAPACITY LOSS FOR VARIOUS LINE LENGTHS & TUBE DIAMETERS

Model Size	Liquid Line in.(mm)	Acceptable Vapor Line Sizes in. (mm)	Cooling Capacity Loss (%) at Total Equivalent Line Length, feet (m) Refer to Long Line Application Guideline to calculate equivalent length										
			Standard Application			Long Line Application (Requires Accessories)							
			25' (7.6)	50' (15.2)	80' (24.4)	81' (24.7)	100' (30.5)	125' (38.1)	150' (45.7)	175' (53.3)	200' (61)	225' (68.6)	250' (76.2)
18		1/2 (13)	1	2	3	3	4	6	7	8	9	10	12
		5/8 (16)	0	0	1	1	1	1	2	2	3	3	3
		3/4 (19)	0	0	0	0	0	1	1	1	1	1	1
24		5/8 (16)	0	1	1	1	2	3	3	4	4	5	6
		3/4 (19)	0	0	0	0	0	1	1	1	1	1	2
		7/8 (22)	0	0	0	0	0	0	0	0	0	0	1
30		5/8 (16)	1	2	3	3	3	4	5	6	7	8	9
		3/4 (19)	0	0	1	1	1	1	2	2	2	3	3
		7/8 (22)	0	0	0	0	0	1	1	1	1	1	1
36	3/8 (10)	5/8 (16)	1	2	4	4	5	6	7	9	10	11	13
		3/4 (19)	0	0	1	1	1	2	2	3	3	4	4
		7/8 (22)	0	0	0	0	0	1	1	1	1	2	2
42		3/4 (19)	0	1	2	2	2	3	4	4	5	6	6
		7/8 (22)	0	0	1	1	1	1	2	2	2	3	3
		1-1/8 (29)	0	0	0	0	0	0	0	0	0	0	1
48		3/4 (19)	0	1	2	2	3	4	5	5	6	7	8
		7/8 (22)	0	0	1	1	1	2	2	2	3	3	4
		1-1/8 (29)	0	0	0	0	0	0	0	0	1	1	1
60		3/4 (19)	1	2	4	4	5	6	7	9	10	11	12
		7/8 (22)	0	1	2	2	2	3	4	4	5	5	6
		1-1/8(29)	0	0	0	0	1	1	1	1	1	1	2

* Applications are considered "Long Line" if the total equivalent tubing length exceeds 80 feet (24.4m) or there is more than 20 foot (6.1m) vertical separation between indoor and outdoor units. These applications require additional accessories and system modifications for reliable system operation.

Applications in shaded area may have height restrictions that limit allowable total equivalent length when outdoor unit is below indoor unit.

COOLING PERFORMANCE FOR COMBINATION RATINGS Indoor Models

For complete ratings information, use the AHRI website directory search: www.AHRIdirectory.org.

New ratings may be listed online before Specification Sheets are updated.

MODEL	INDOOR MODEL	FURNACE MODEL	AHRI STANDARD RATINGS					
			COOLING					
			CAPACITY BTU/hr	Factory Installed	SEER			EER
STANDARD	TDR	TXV						
R4A318AKA*	*ED*4X18B**		17200	TXV		13		10.9
R4A318GKA*	FEA4X18**A*		17200	TDR&TXV	14			12
	FEA4X24**A*		17200	TDR&TXV	14.5			12.2
	FEM4P18**A*		17800	TDR	14.5			12
	FEM4P18**A*		17600	TDR			14.5	12
	FEM4P24**A*		17800	TDR	14.5			12
	FEM4P24**A*		17800	TDR			14.5	12
	FEM4P30**A*		17700	TDR			13.5	11
	FEM4X18****		17200	TDR&TXV	14			12
	FEM4X24****		17200	TDR&TXV	14			12
	FS(M,U)4P18**A*		17800	TDR	13.5			11
	FS(M,U)4P18**A*		17800	TDR			13.5	11
	FS(M,U)4P24**A*		17800	TDR	13.5			11
	FS(M,U)4P24**A*		17600	TDR			13.5	11
	FSA4X24**A*		17200	TDR&TXV	13			10.9
	FVM4X24****		17200	TDR&TXV	14			12
	FXM4X18**A*		17800	TDR&TXV	14.5			12
	FXM4X24**A*		17800	TDR&TXV	14.5			12
	FXM4X30**A*		17800	TDR&TXV	14.5			12
	EA*4X18*14A*	*8MV*0701412**	17500	TDR&TXV	14			12
	EA*4X18*14A*	*9MV*0401410A**	17500	TDR&TXV	14			11.5
	EA*4X18*14A*	*9MX*0401410A**	17400	TDR&TXV	14.2			11.7
	EA*4X18*14A*		17600	TXV			13	10.9
	EA*4X24*14A*	*8MV*0701412**	17800	TDR&TXV	14.5			12.2
	EA*4X24*14A*	*9MV*0401410A**	17900	TDR&TXV	14.2			11.8
	EA*4X24*14A*	*9MX*0401410A**	17800	TDR&TXV	14.5			12
	EA*4X24*14A*		17900	TXV			13.2	11
	EA*4X24*17A*	*8MV*0901716**	17800	TDR&TXV	14.5			12.2
	EA*4X24*17A*	*9MA*0601714A**	17800	TDR&TXV	14.5			12
	EA*4X24*17A*	*9MA*0801714A**	17800	TDR&TXV	14.5			12
	EA*4X24*17A*	*9MV*0401410A**	18000	TDR&TXV	14.2			11.8
	EA*4X24*17A*	*9MV*0601714A**	18200	TDR&TXV	15			12.4
	EA*4X24*17A*	*9MV*0801716A**	18300	TDR&TXV	15			12.5
	EA*4X24*17A*	*9MX*0401410A**	17800	TDR&TXV	14.5			12
	EA*4X24*17A*		17900	TXV			13.2	11
	EHD4X24A**	*8MV*0701412**	17900	TDR&TXV	14.5			12.2
	EHD4X24A**	*8MV*0901716**	17900	TDR&TXV	14.5			12.2
	EHD4X24A**	*8MX*0451408**	18000	TDR&TXV	14.5			12.2
	EHD4X24A**	*9MA*0601714A**	18000	TDR&TXV	14.5			12
	EHD4X24A**	*9MA*0801714A**	17900	TDR&TXV	14.5			12
	EHD4X24A**	*9MAC0602120A**	18100	TDR&TXV	14.5			12
	EHD4X24A**	*9MV*0401410A**	18000	TDR&TXV	14.2			11.8
	EHD4X24A**	*9MV*0601714A**	18000	TDR&TXV	14.5			12
	EHD4X24A**	*9MV*0801716A**	18100	TDR&TXV	15			12.4
	EHD4X24A**	*9MV*0802120A**	18300	TDR&TXV	14.5			12.2
	EHD4X24A**	*9MV*1002120A**	18400	TDR&TXV	15			12.5
	EHD4X24A**	*9MV*1202422A**	18400	TDR&TXV	15			12.4
	EHD4X24A**	*9MX*0401410A**	17800	TDR&TXV	14.5			12

2009 ENERGY STAR compliance for combinations with both: SEER 14.50 or higher and EER 12.00 or higher.

† For coils not listed with a matching furnace or blower, coil rating applies with any indoor blower device

COOLING PERFORMANCE FOR COMBINATION RATINGS Indoor Models

For complete ratings information, use the AHRI website directory search: www.AHRIdirectory.org.
New ratings may be listed online before Specification Sheets are updated.

MODEL	INDOOR MODEL	FURNACE MODEL	AHRI STANDARD RATINGS					
			COOLING					
			CAPACITY BTU/hr	Factory Installed	SEER			EER
STANDARD	TDR	TXV						
R4A318AKA*	EHD4X24A**	MV08B15**B*	17200	TDR&TXV	14			12
R4A318GKA*	EHD4X24A**	*9MV*1002116A**	18300	TDR&TXV	15			12.4
	EHD4X24A**		17200	TXV		13		10.9
	EMA4X24D**		17200	TXV		13		10.9
	EN(A,D)4X18*14**	*8MV*0701412**	17500	TDR&TXV	14.5			12
	EN(A,D)4X18*14**	*8MX*0451408**	17800	TDR&TXV	14.5			12
	EN(A,D)4X18*14**	*9MV*0401410A**	17600	TDR&TXV	14.2			11.7
	EN(A,D)4X18*14**	*9MX*0401410A**	17500	TDR&TXV	14.2			11.8
	EN(A,D)4X18*14**		17600	TXV		13		11
	EN(A,D)4X19*17**	*8MV*0701412**	17600	TDR&TXV	14.5			12
	EN(A,D)4X19*17**	*8MV*0901716**	17800	TDR&TXV	14.5			12
	EN(A,D)4X19*17**	*8MX*0451408**	18000	TDR&TXV	14.5			12
	EN(A,D)4X19*17**	*9MA*0601714A**	18000	TDR&TXV	14.5			12
	EN(A,D)4X19*17**	*9MA*0801714A**	17900	TDR&TXV	15			12.4
	EN(A,D)4X19*17**	*9MV*0401410A**	18100	TDR&TXV	14.5			12
	EN(A,D)4X19*17**	*9MV*0601714A**	18400	TDR&TXV	15			12.5
	EN(A,D)4X19*17**	*9MV*0801716A**	18500	TDR&TXV	15.2			12.5
	EN(A,D)4X19*17**	*9MX*0401410A**	17900	TDR&TXV	14.5			12
	EN(A,D)4X19*17**	MV08B15**B*	18000	TDR&TXV	14.5			12
	EN(A,D)4X19*17**	NOMV106D12*	18000	TDR&TXV	14.5			12
	EN(A,D)4X19*17**		18000	TXV		13		11
	EN(A,D)4X24*14**	*8MV*0701412**	17800	TDR&TXV	14.5			12.2
	EN(A,D)4X24*14**	*8MX*0451408**	18000	TDR&TXV	14.5			12.2
	EN(A,D)4X24*14**	*9MV*0401410A**	17900	TDR&TXV	14.2			11.8
	EN(A,D)4X24*14**	*9MX*0401410A**	17700	TDR&TXV	14.2			11.8
	EN(A,D)4X24*14**		17900	TXV		13.2		11
	EN(A,D)4X24*17**	*8MV*0901716**	17800	TDR&TXV	14.5			12.2
	EN(A,D)4X24*17**	*9MA*0601714A**	17900	TDR&TXV	14.5			12
	EN(A,D)4X24*17**	*9MA*0801714A**	17800	TDR&TXV	14.5			12
	EN(A,D)4X24*17**	*9MV*0401410A**	17900	TDR&TXV	14.2			11.8
	EN(A,D)4X24*17**	*9MV*0601714A**	18000	TDR&TXV	14.5			12
	EN(A,D)4X24*17**	*9MV*0801716A**	18100	TDR&TXV	15			12.4
	EN(A,D)4X24*17**	*9MX*0401410A**	17700	TDR&TXV	14.2			11.8
	EN(A,D)4X24*17**		17900	TXV		13.2		11
	ENH4X24*17**	*8MV*0701412**	17800	TDR&TXV	14.5			12.2
	ENH4X24*17**	*8MV*0901716**	17800	TDR&TXV	14.5			12.2
	ENH4X24*17**	*8MX*0451408**	17800	TDR&TXV	14.5			12.2
	ENH4X24*17**	*9MA*0601714A**	17900	TDR&TXV	14.5			12
	ENH4X24*17**	*9MA*0801714A**	17800	TDR&TXV	14.5			12
	ENH4X24*17**	*9MV*0401410A**	17900	TDR&TXV	14.2			11.8
	ENH4X24*17**	*9MV*0601714A**	18000	TDR&TXV	14.5			12
	ENH4X24*17**	*9MV*0801716A**	18100	TDR&TXV	15			12.4
	ENH4X24*17**	*9MV*1202422A**	18300	TDR&TXV	15			12.4
	ENH4X24*17**	*9MX*0401410A**	17700	TDR&TXV	14.2			11.8
	ENH4X24*17**	*9MV*1002116A**	18300	TDR&TXV	15			12.4
	ENH4X24*17**		17900	TXV		13.2		11

* Tested Combo

2009 ENERGY STAR compliance for combinations with both: SEER 14.50 or higher and EER 12.00 or higher.

† For coils not listed with a matching furnace or blower, coil rating applies with any indoor blower device

COOLING PERFORMANCE FOR COMBINATION RATINGS Indoor Models

For complete ratings information, use the AHRI website directory search: www.AHRIdirectory.org.
 New ratings may be listed online before Specification Sheets are updated.

MODEL	INDOOR MODEL	FURNACE MODEL	AHRI STANDARD RATINGS					
			COOLING					
			CAPACITY BTU/hr	Factory Installed	SEER			EER
STANDARD	TDR	TXV						
R4A324AKA R4A324GKA	*ED*4X24B**		23000	TXV		13		11
	FEA4X24**A*		23000	TDR&TXV	14			11.7
	FEA4X30**A*		23200	TDR&TXV	14			11.7
	FEM4P24**A*		22800	TDR	13.5			11
	FEM4P24**A*		23000	TDR			13.5	11
	FEM4P30**A*		23600	TDR	14			12
	FEM4P30**A*		23600	TDR			14	12
	FEM4X24****		23000	TDR&TXV	14			11.5
	FEM4X30****		23000	TDR&TXV	14			12
	FS(M,U)4P24**A*		23400	TDR	13.5			11.5
	FS(M,U)4P24**A*		23400	TDR			13.5	11.5
	FS(M,U)4P30**A*		23600	TDR	13.5			11
	FS(M,U)4P30**A*		23400	TDR			13.5	11.5
	FS(M,U)4X30****		23000	TDR&TXV	13			11
	FVM4X24****		23000	TDR&TXV	14			12
	FVM4X36****		23000	TDR&TXV	14			12
	FXM4X24**A*		23400	TDR&TXV	14.5			12
	FXM4X30**A*		23600	TDR&TXV	14			11.5
	FXM4X36**A*		23800	TDR&TXV	14.5			12
	EA*4X24*14A*	*8MV*0701412**		22800	TDR&TXV	14		12
	EA*4X24*14A*	*9MV*0401410A**		22800	TDR&TXV	13.7		11.4
	EA*4X24*14A*	*9MX*0401410A**		23000	TDR&TXV	13.3		11
	EA*4X24*14A*			23000	TXV		13	11
	EA*4X24*17A*	*8MV*0901716**		23000	TDR&TXV	14.5		12.2
	EA*4X24*17A*	*9MA*0601714A**		23000	TDR&TXV	14.5		12
	EA*4X24*17A*	*9MA*0801714A**		22800	TDR&TXV	14.5		12
	EA*4X24*17A*	*9MV*0401410A**		22800	TDR&TXV	13.7		11.4
	EA*4X24*17A*	*9MV*0601714A**		23000	TDR&TXV	14.5		12
	EA*4X24*17A*	*9MV*0801716A**		23000	TDR&TXV	14.5		12
	EA*4X24*17A*	*9MX*0401410A**		23000	TDR&TXV	13.3		11
	EA*4X24*17A*	*9MX*0601714A**		23000	TDR&TXV	14.5		12
	EA*4X24*17A*			23000	TXV		13	11
	EA*4X30*14A*	*8MV*0701412**		23000	TDR&TXV	14.5		12
	EA*4X30*14A*	*9MV*0401410A**		23000	TDR&TXV	13.7		11.4
	EA*4X30*14A*	*9MX*0401410A**		23200	TDR&TXV	13.5		11.2
	EA*4X30*14A*			23200	TXV		13	11
	EA*4X30*17A*	*8MV*0901716**		23200	TDR&TXV	14.5		12.2
	EA*4X30*17A*	*9MA*0601714A**		23200	TDR&TXV	14.5		12
	EA*4X30*17A*	*9MA*0801714A**		23000	TDR&TXV	14.5		12
	EA*4X30*17A*	*9MV*0401410A**		23000	TDR&TXV	13.7		11.4
	EA*4X30*17A*	*9MV*0601714A**		23200	TDR&TXV	14.5		12
	EA*4X30*17A*	*9MV*0801716A**		23400	TDR&TXV	14.5		12
EA*4X30*17A*	*9MX*0401410A**		23400	TDR&TXV	13.5		11.2	
EA*4X30*17A*	*9MX*0601714A**		23200	TDR&TXV	14.5		12	
EA*4X30*17A*			23200	TXV		13	11	
EA*4X36*17A*			23200	TXV		13	11	
EA*4X36*21A*	*9MA*0601714A**		23200	TDR&TXV	14.5		12	
EA*4X36*21A*	*9MA*0801714A**		23200	TDR&TXV	14.5		12	
EA*4X36*21A*	*9MA*0802120A**		23600	TDR&TXV	15		12.2	

COOLING PERFORMANCE FOR COMBINATION RATINGS Indoor Models

For complete ratings information, use the AHRI website directory search: www.AHRIdirectory.org.
 New ratings may be listed online before Specification Sheets are updated.

MODEL	INDOOR MODEL	FURNACE MODEL	AHRI STANDARD RATINGS					
			COOLING					
			CAPACITY BTU/hr	Factory Installed	SEER			EER
STANDARD	TDR	TXV						
R4A324AKA	EA*4X36*21A*	*9MA*1002122A**	23600	TDR&TXV	15			12.2
R4A324GKA	EA*4X36*21A*	*9MAC0602120A**	23400	TDR&TXV	14.5			12
	EA*4X36*21A*	*9MV*0802120A**	23800	TDR&TXV	14.5			12.2
	EA*4X36*21A*	*9MV*1002120A**	24000	TDR&TXV	15			12.5
	EA*4X36*21A*	*9MA*1002120A**	23400	TDR&TXV	14.5			12
	EA*4X36*21A*	*9MV*1002116A**	23600	TDR&TXV	15			12.4
	EA*4X36*21A*		23400	TXV		13		11
	EHD4X24A**	*8MV*0701412**	23000	TDR&TXV	14.5			12
	EHD4X24A**	*8MV*0901716**	23200	TDR&TXV	14.5			12
	EHD4X24A**	*8MV*1102120**	23200	TDR&TXV	14.5			12
	EHD4X24A**	*8MV*1352422**	23200	TDR&TXV	14.5			12
	EHD4X24A**	*8MX*0451408**	23200	TDR&TXV	14.5			12
	EHD4X24A**	*9MA*0601714A**	23200	TDR&TXV	14.2			11.8
	EHD4X24A**	*9MA*0801714A**	23000	TDR&TXV	14.5			12
	EHD4X24A**	*9MA*0802120A**	23400	TDR&TXV	14.5			12
	EHD4X24A**	*9MA*1002122A**	23400	TDR&TXV	14.5			12
	EHD4X24A**	*9MA*1202422A**	23400	TDR&TXV	14.5			12
	EHD4X24A**	*9MAC0602120A**	23200	TDR&TXV	14.5			12
	EHD4X24A**	*9MV*0401410A**	23000	TDR&TXV	13.7			11.4
	EHD4X24A**	*9MV*0601714A**	23000	TDR&TXV	14.5			12
	EHD4X24A**	*9MV*0801716A**	23000	TDR&TXV	14.5			12
	EHD4X24A**	*9MV*0802120A**	22800	TDR&TXV	14.5			12
	EHD4X24A**	*9MV*1002120A**	23000	TDR&TXV	14.5			12
	EHD4X24A**	*9MV*1202422A**	23000	TDR&TXV	14.5			12
	EHD4X24A**	*9MX*0401410A**	23200	TDR&TXV	13.5			11.2
	EHD4X24A**	*9MX*0601714A**	23000	TDR&TXV	14.5			12
	EHD4X24A**	MV08B15**B*	23000	TDR&TXV	14			12
	EHD4X24A**	MV12F19**B*	23000	TDR&TXV	14			12
	EHD4X24A**	*9MA*1002120A**	23400	TDR&TXV	14.5			12
	EHD4X24A**	*9MV*1002116A**	22800	TDR&TXV	14.5			12
	EHD4X24A**		23000	TXV		13		11
	EHD4X30A**	*8MV*0701412**	23000	TDR&TXV	14.5			12
	EHD4X30A**	*8MV*0901716**	23200	TDR&TXV	14.5			12.2
	EHD4X30A**	*8MV*1102120**	23200	TDR&TXV	14.5			12.2
	EHD4X30A**	*8MV*1352422**	23200	TDR&TXV	14.5			12.2
	EHD4X30A**	*8MX*0451408**	23400	TDR&TXV	14.5			12
	EHD4X30A**	*9MA*0601714A**	23200	TDR&TXV	14.5			12
	EHD4X30A**	*9MA*0801714A**	23200	TDR&TXV	14.5			12
	EHD4X30A**	*9MA*0802120A**	23600	TDR&TXV	14.5			12
	EHD4X30A**	*9MA*1002122A**	23600	TDR&TXV	14.5			12
	EHD4X30A**	*9MA*1202422A**	23400	TDR&TXV	14.5			12
	EHD4X30A**	*9MAC0602120A**	23400	TDR&TXV	14.5			12
	EHD4X30A**	*9MV*0401410A**	23200	TDR&TXV	13.7			11.4
	EHD4X30A**	*9MV*0601714A**	23200	TDR&TXV	14.5			12
	EHD4X30A**	*9MV*0801716A**	23400	TDR&TXV	14.5			12
	EHD4X30A**	*9MV*0802120A**	23400	TDR&TXV	14.5			12
	EHD4X30A**	*9MV*1002120A**	23400	TDR&TXV	14.5			12
	EHD4X30A**	*9MV*1202422A**	23400	TDR&TXV	14.5			12
	EHD4X30A**	*9MX*0401410A**	23400	TDR&TXV	13.5			11.2
	EHD4X30A**	*9MX*0601714A**	23200	TDR&TXV	14.5			12

COOLING PERFORMANCE FOR COMBINATION RATINGS Indoor Models

For complete ratings information, use the AHRI website directory search: www.AHRIdirectory.org.

New ratings may be listed online before Specification Sheets are updated.

MODEL	INDOOR MODEL	FURNACE MODEL	AHRI STANDARD RATINGS					
			COOLING					
			CAPACITY BTU/hr	Factory Installed	SEER			EER
STANDARD	TDR	TXV						
R4A324AKA	EHD4X30A**	MV08B15**B*	23000	TDR&TXV	14			12
R4A324GKA	EHD4X30A**	MV12F19**B*	23000	TDR&TXV	14.5			12
	EHD4X30A**	*9MA*1002120A**	23400	TDR&TXV	14.5			12
	EHD4X30A**	*9MV*1002116A**	23200	TDR&TXV	14.5			12
	EHD4X30A**		23000	TXV		13		11
	EMA4X24D**		23000	TXV		13		11
	EN(A,D)4X24*14**	*8MV*0701412**	22800	TDR&TXV	14			11.7
	EN(A,D)4X24*14**	*8MX*0451408**	23000	TDR&TXV	14			11.7
	EN(A,D)4X24*14**	*9MV*0401410A**	22800	TDR&TXV	13.7			11.4
	EN(A,D)4X24*14**	*9MX*0401410A**	23000	TDR&TXV	13.3			11
	EN(A,D)4X24*14**		23000	TXV		13		11
	EN(A,D)4X24*17**	*8MV*0901716**	22800	TDR&TXV	14.5			12
	EN(A,D)4X24*17**	*9MA*0601714A**	22800	TDR&TXV	14.2			11.8
	EN(A,D)4X24*17**	*9MA*0801714A**	22800	TDR&TXV	14.5			12
	EN(A,D)4X24*17**	*9MV*0401410A**	22800	TDR&TXV	13.7			11.4
	EN(A,D)4X24*17**	*9MV*0601714A**	22800	TDR&TXV	14.2			11.8
	EN(A,D)4X24*17**	*9MV*0801716A**	22800	TDR&TXV	14.5			12
	EN(A,D)4X24*17**	*9MX*0401410A**	23000	TDR&TXV	13.3			11
	EN(A,D)4X24*17**	*9MX*0601714A**	22800	TDR&TXV	14.5			12
	EN(A,D)4X24*17**		23000	TXV		13		11
	EN(A,D)4X30*14**	*8MV*0701412**	23000	TDR&TXV	14.5			12
	EN(A,D)4X30*14**	*8MX*0451408**	23200	TDR&TXV	14.5			12
	EN(A,D)4X30*14**	*9MV*0401410A**	23000	TDR&TXV	13.7			11.4
	EN(A,D)4X30*14**	*9MX*0401410A**	23200	TDR&TXV	13.5			11.2
	EHD4X30A**	*9MA*0801714A**	23200	TDR&TXV	14.5			12
	EHD4X30A**	*9MA*0802120A**	23600	TDR&TXV	14.5			12
	EHD4X30A**	*9MA*1002122A**	23600	TDR&TXV	14.5			12
	EHD4X30A**	*9MA*1202422A**	23400	TDR&TXV	14.5			12
	EHD4X30A**	*9MAC0602120A**	23400	TDR&TXV	14.5			12
	EHD4X30A**	*9MV*0401410A**	23200	TDR&TXV	13.7			11.4
	EHD4X30A**	*9MV*0601714A**	23200	TDR&TXV	14.5			12
	EHD4X30A**	*9MV*0801716A**	23400	TDR&TXV	14.5			12
	EHD4X30A**	*9MV*0802120A**	23400	TDR&TXV	14.5			12
	EHD4X30A**	*9MV*1002120A**	23400	TDR&TXV	14.5			12
	EHD4X30A**	*9MV*1202422A**	23400	TDR&TXV	14.5			12
	EHD4X30A**	*9MX*0401410A**	23400	TDR&TXV	13.5			11.2
	EHD4X30A**	*9MX*0601714A**	23200	TDR&TXV	14.5			12
	EHD4X30A**	*9MA*0801714A**	23200	TDR&TXV	14.5			12
	EHD4X30A**	*9MA*0802120A**	23600	TDR&TXV	14.5			12
	EHD4X30A**	*9MA*1002122A**	23600	TDR&TXV	14.5			12
	EHD4X30A**	*9MA*1202422A**	23400	TDR&TXV	14.5			12
	EHD4X30A**	*9MAC0602120A**	23400	TDR&TXV	14.5			12
	EHD4X30A**	*9MV*0401410A**	23200	TDR&TXV	13.7			11.4
	EHD4X30A**	*9MV*0601714A**	23200	TDR&TXV	14.5			12
	EHD4X30A**	*9MV*0801716A**	23400	TDR&TXV	14.5			12
	EHD4X30A**	*9MV*0802120A**	23400	TDR&TXV	14.5			12
	EHD4X30A**	*9MV*1002120A**	23400	TDR&TXV	14.5			12
	EHD4X30A**	*9MV*1202422A**	23400	TDR&TXV	14.5			12
	EHD4X30A**	*9MX*0401410A**	23400	TDR&TXV	13.5			11.2
	EHD4X30A**	*9MX*0601714A**	23200	TDR&TXV	14.5			12

COOLING PERFORMANCE FOR COMBINATION RATINGS Indoor Models

For complete ratings information, use the AHRI website directory search: www.AHRIdirectory.org.
 New ratings may be listed online before Specification Sheets are updated.

MODEL	INDOOR MODEL	FURNACE MODEL	AHRI STANDARD RATINGS					
			COOLING					
			CAPACITY BTU/hr	Factory Installed	SEER			EER
STANDARD	TDR	TXV						
R4A324AKA R4A324GKA	ENH4X24*17**	*9MV*0401410A**	22800	TDR&TXV	13.7			11.4
	ENH4X24*17**	*9MV*0601714A**	22800	TDR&TXV	14.2			11.8
	ENH4X24*17**	*9MV*0801716A**	22800	TDR&TXV	14.5			12
	ENH4X24*17**	*9MV*1202422A**	22800	TDR&TXV	14.5			12
	ENH4X24*17**	*9MX*0401410A**	23000	TDR&TXV	13.3			11
	ENH4X24*17**	*9MX*0601714A**	22800	TDR&TXV	14.5			12
	ENH4X24*17**	*9MA*1002120A**	23200	TDR&TXV	14.5			12
	ENH4X24*17**	*9MV*1002116A**	22600	TDR&TXV	14.5			12
	ENH4X24*17**		23000	TXV		13		11
	ENH4X30*17**	*8MV*0701412**	23000	TDR&TXV	14.5			12
	ENH4X30*17**	*8MV*0901716**	23200	TDR&TXV	14.5			12.2
	ENH4X30*17**	*8MV*1102120**	23200	TDR&TXV	14.5			12.2
	ENH4X30*17**	*8MV*1352422**	23200	TDR&TXV	14.5			12.2
	ENH4X30*17**	*8MX*0451408**	23400	TDR&TXV	14.5			12
	ENH4X30*17**	*9MA*0601714A**	23200	TDR&TXV	14.5			12
	ENH4X30*17**	*9MA*0801714A**	23000	TDR&TXV	14.5			12
	ENH4X30*17**	*9MA*1202422A**	23400	TDR&TXV	14.5			12
	ENH4X30*17**	*9MV*0401410A**	23000	TDR&TXV	13.7			11.4
	ENH4X30*17**	*9MV*0601714A**	23200	TDR&TXV	14.5			12
	ENH4X30*17**	*9MV*0801716A**	23400	TDR&TXV	14.5			12
	ENH4X30*17**	*9MV*1202422A**	23400	TDR&TXV	14.5			12
	ENH4X30*17**	*9MX*0401410A**	23400	TDR&TXV	13.5			11.2
	ENH4X30*17**	*9MX*0601714A**	23200	TDR&TXV	14.5			12
	ENH4X30*17**	*9MA*1002120A**	23400	TDR&TXV	14.5			12
	ENH4X30*17**	*9MV*1002116A**	23200	TDR&TXV	14.5			12
	ENH4X30*17**		23200	TXV		13		11
	ENH4X31*17**	*9MA*0601714A**	23600	TDR&TXV	14.5			12
	ENH4X31*17**	*9MA*0801714A**	23400	TDR&TXV	15			12.5
	ENH4X31*17**	*9MA*1202422A**	23800	TDR&TXV	15			12.5
	ENH4X31*17**	*9MV*0401410A**	23600	TDR&TXV	14			11.5
	ENH4X31*17**	*9MV*0601714A**	23600	TDR&TXV	14.5			12
	ENH4X31*17**	*9MV*0801716A**	23800	TDR&TXV	15			12.5
	ENH4X31*17**	*9MV*1202422A**	24000	TDR&TXV	15.2			12.5
ENH4X31*17**	*9MX*0401410A**	23800	TDR&TXV	13.7			11.4	
ENH4X31*17**	*9MX*0601714A**	23800	TDR&TXV	15			12.5	
ENH4X31*17**	*9MA*1002120A**	23800	TDR&TXV	15			12.5	
ENH4X31*17**	*9MV*1002116A**	23600	TDR&TXV	15			12.5	

* Tested Combo

COOLING PERFORMANCE FOR COMBINATION RATINGS Indoor Models

For complete ratings information, use the AHRI website directory search: www.AHRIdirectory.org.
 New ratings may be listed online before Specification Sheets are updated.

MODEL	INDOOR MODEL	FURNACE MODEL	AHRI STANDARD RATINGS					
			COOLING					
			CAPACITY BTU/hr	Factory Installed	SEER			EER
STANDARD	TDR	TXV						
R4A330AKA	*ED*4X30B**		27200	TXV		13		10.8
R4A330GKA	FEA4X30**A*		27600	TDR&TXV	13.5			11.5
	FEA4X36**A*		27800	TDR&TXV	13.5			11.5
	FEM4P30**A*		27400	TDR	13.5			11
	FEM4P30**A*		27400	TDR			13.5	11
	FEM4P36**A*		27400	TDR	13.5			11
	FEM4P36**A*		27600	TDR			13.5	11
	FEM4P42**A*		28000	TDR			13.5	11
	FEM4X30****		27200	TDR&TXV	13.5			11.5
	FEM4X36****		27200	TDR&TXV	13.5			11.5
	FS(M,U)4P30**A*		27600	TDR	13			11
	FS(M,U)4P30**A*		27600	TDR			13	11
	FS(M,U)4P36**A*		27600	TDR	13			11
	FS(M,U)4P36**A*		27600	TDR			13.5	11
	FSA4X36**A*		27200	TDR&TXV	13			10.8
	FSM4X36****		27200	TDR&TXV	13			10.8
	FVM4X24****		27200	TDR&TXV	14			11.5
	FVM4X36****		27200	TDR&TXV	14			12
	FVM4X48****		27200	TDR&TXV	14			12
	FXM4X30**A*		28000	TDR&TXV	14			11.5
	FXM4X36**A*		28200	TDR&TXV	14.5			12
	FXM4X42**A*		28200	TDR&TXV	13.5			11
	EA*4X30*14A*	*8MV*0701412**	27200	TDR&TXV	13.7			11.7
	EA*4X30*14A*		27400	TXV		13		10.9
	EA*4X30*17A*	*8MV*0901716**	27400	TDR&TXV	14			12
	EA*4X30*17A*	*9MA*0601714A**	27200	TDR&TXV	14			11.5
	EA*4X30*17A*	*9MA*0801714A**	27400	TDR&TXV	14.2			11.8
	EA*4X30*17A*	*9MV*0601714A**	27400	TDR&TXV	14			11.5
	EA*4X30*17A*	*9MV*0801716A**	27400	TDR&TXV	14.2			11.8
	EA*4X30*17A*	*9MX*0601714A**	27400	TDR&TXV	14			11.5
	EA*4X30*17A*	*9MX*0801716A**	27600	TDR&TXV	14			11.5
	EA*4X30*17A*		27400	TXV		13		10.8
	EA*4X36*14A*	*8MV*0701412**	27400	TDR&TXV	14			11.7
	EA*4X36*14A*		27400	TXV		13		10.8
	EA*4X36*17A*	*8MV*0901716**	27400	TDR&TXV	14			12
	EA*4X36*17A*	*9MA*0601714A**	27400	TDR&TXV	14			11.5
	EA*4X36*17A*	*9MA*0801714A**	27600	TDR&TXV	14.2			11.8
	EA*4X36*17A*	*9MV*0601714A**	27400	TDR&TXV	14.2			11.8
	EA*4X36*17A*	*9MV*0801716A**	27600	TDR&TXV	14.2			11.8
	EA*4X36*17A*	*9MX*0601714A**	27600	TDR&TXV	14			11.5
	EA*4X36*17A*	*9MX*0801716A**	27800	TDR&TXV	14.2			11.8
	EA*4X36*17A*		27600	TXV		13		10.8
	EA*4X36*21A*	*8MV*1102120**	27600	TDR&TXV	14			12
	EA*4X36*21A*	*9MA*0601714A**	27400	TDR&TXV	14.2			11.8
	EA*4X36*21A*	*9MA*0801714A**	27600	TDR&TXV	14.2			11.8
	EA*4X36*21A*	*9MA*0802120A**	27600	TDR&TXV	14.5			12
	EA*4X36*21A*	*9MA*1002122A**	27800	TDR&TXV	14.5			12
	EA*4X36*21A*	*9MAC0602120A**	27600	TDR&TXV	14.2			11.8
	EA*4X36*21A*	*9MV*0601714A**	27600	TDR&TXV	14.2			11.8

COOLING PERFORMANCE FOR COMBINATION RATINGS Indoor Models

For complete ratings information, use the AHRI website directory search: www.AHRIdirectory.org.
 New ratings may be listed online before Specification Sheets are updated.

MODEL	INDOOR MODEL	FURNACE MODEL	AHRI STANDARD RATINGS					
			COOLING					
			CAPACITY BTU/hr	Factory Installed	SEER			EER
STANDARD	TDR	TXV						
R4A330AKA	EA*4X36*21A*	*9MV*0801716A**	27600	TDR&TXV	14.2			11.8
R4A330GKA	EA*4X36*21A*	*9MV*0802120A**	27800	TDR&TXV	14.5			12
	EA*4X36*21A*	*9MV*1002120A**	27600	TDR&TXV	14.5			12
	EA*4X36*21A*	*9MX*0601714A**	27600	TDR&TXV	14.2			11.8
	EA*4X36*21A*	*9MX*0801716A**	27800	TDR&TXV	14.2			11.8
	EA*4X36*21A*	*9MA*1002120A**	27600	TDR&TXV	14.2			11.8
	EA*4X36*21A*	*9MV*1002116A**	27600	TDR&TXV	14.2			11.8
	EA*4X36*21A*		27600	TXV		13		10.8
	EA*4X42*21A*	*9MA*0802120A**	27800	TDR&TXV	14.5			12
	EA*4X42*21A*	*9MA*1002122A**	28000	TDR&TXV	14.5			12
	EA*4X42*21A*	*9MAC0602120A**	27800	TDR&TXV	14			11.7
	EA*4X42*21A*	*9MV*0802120A**	27800	TDR&TXV	14.5			11.7
	EA*4X42*21A*	*9MV*1002120A**	27800	TDR&TXV	14.5			12
	EA*4X42*21A*	*9MV*1002116A**	27800	TDR&TXV	14.5			12
	EA*4X42*21A*		27600	TXV		13		11.0
	EA*4X42*24A*		27600	TXV		13		11.0
	EHD4X30A**	*8MV*0701412**	27200	TDR&TXV	13.5			11.7
	EHD4X30A**	*8MV*0901716**	27400	TDR&TXV	14			11.7
	EHD4X30A**	*8MV*1102120**	27600	TDR&TXV	14			11.7
	EHD4X30A**	*8MV*1352422**	27600	TDR&TXV	14			11.7
	EHD4X30A**	*8MX*0701716**	27600	TDR&TXV	13.5			11.5
	EHD4X30A**	*8MX*0902116**	27600	TDR&TXV	14			11.7
	EHD4X30A**	*9MA*0601714A**	27400	TDR&TXV	14			11.5
	EHD4X30A**	*9MA*0801714A**	27600	TDR&TXV	14.2			11.8
	EHD4X30A**	*9MA*0802120A**	27600	TDR&TXV	14			11.5
	EHD4X30A**	*9MA*1002122A**	27800	TDR&TXV	14.2			11.8
	EHD4X30A**	*9MA*1202422A**	27600	TDR&TXV	14.2			11.8
	EHD4X30A**	*9MAC0602120A**	27600	TDR&TXV	14			11.5
	EHD4X30A**	*9MV*0601714A**	27400	TDR&TXV	14			11.5
	EHD4X30A**	*9MV*0801716A**	27400	TDR&TXV	14.2			11.8
	EHD4X30A**	*9MV*0802120A**	27400	TDR&TXV	14.5			11.7
	EHD4X30A**	*9MV*1002120A**	27200	TDR&TXV	14.2			11.8
	EHD4X30A**	*9MV*1202422A**	27600	TDR&TXV	14.2			11.8
	EHD4X30A**	*9MX*0601714A**	27600	TDR&TXV	14			11.5
	EHD4X30A**	*9MX*0801716A**	27800	TDR&TXV	14			11.5
	EHD4X30A**	MV08B15**B*	27200	TDR&TXV	14			12
	EHD4X30A**	MV12F19**B*	27200	TDR&TXV	14			12
	EHD4X30A**	*9MA*1002120A**	27600	TDR&TXV	14.2			11.8
	EHD4X30A**	*9MV*1002116A**	27400	TDR&TXV	14.2			11.8
	EHD4X30A**		27200	TXV		13		10.8
	EHD4X36A**	*8MV*0701412**	27800	TDR&TXV	14			12
	EHD4X36A**	*8MV*0901716**	27800	TDR&TXV	14.5			12
	EHD4X36A**	*8MV*1102120**	27800	TDR&TXV	14			12
	EHD4X36A**	*8MV*1352422**	27800	TDR&TXV	14			12
	EHD4X36A**	*8MX*0701716**	27800	TDR&TXV	13.5			11.7
	EHD4X36A**	*8MX*0902116**	27800	TDR&TXV	14			12
	EHD4X36A**	*9MA*0601714A**	27800	TDR&TXV	14.2			11.8
	EHD4X36A**	*9MA*0801714A**	28000	TDR&TXV	14.5			12
	EHD4X36A**	*9MA*0802120A**	28000	TDR&TXV	14.5			12
	EHD4X36A**	*9MA*1002122A**	28200	TDR&TXV	14.5			12

COOLING PERFORMANCE FOR COMBINATION RATINGS Indoor Models

For complete ratings information, use the AHRI website directory search: www.AHRIdirectory.org.
 New ratings may be listed online before Specification Sheets are updated.

MODEL	INDOOR MODEL	FURNACE MODEL	AHRI STANDARD RATINGS					
			COOLING					
			CAPACITY BTU/hr	Factory Installed	SEER			EER
STANDARD	TDR	TXV						
R4A330AKA	EHD4X36A**	*9MA*1202422A**	28000	TDR&TXV	14.5			12
R4A330GKA	EHD4X36A**	*9MAC0602120A**	28000	TDR&TXV	14.2			11.8
	EHD4X36A**	*9MV*0601714A**	27800	TDR&TXV	14.2			11.8
	EHD4X36A**	*9MV*0801716A**	28000	TDR&TXV	14.5			12
	EHD4X36A**	*9MV*0802120A**	28000	TDR&TXV	14.5			12
	EHD4X36A**	*9MV*1002120A**	27800	TDR&TXV	14.5			12
	EHD4X36A**	*9MV*1202422A**	28000	TDR&TXV	14.5			12
	EHD4X36A**	*9MX*0601714A**	28000	TDR&TXV	14.2			11.8
	EHD4X36A**	*9MX*0801716A**	28200	TDR&TXV	14.2			11.8
	EHD4X36A**	MV08B15**B*	27200	TDR&TXV	14			12
	EHD4X36A**	MV12F19**B*	27200	TDR&TXV	14			12
	EHD4X36A**	*9MA*1002120A**	28200	TDR&TXV	14.5			12
	EHD4X36A**	*9MV*1002116A**	28000	TDR&TXV	14.5			12
	EHD4X36A**	*9MVX040	27200	TDR&TXV	13.5			11
	EHD4X36A**		27200	TXV			13	10.8
	EMA4X36D**		27200	TXV			13	10.8
	EN(A,D)4X30*14**	*8MV*0701412**	27200	TDR&TXV	14			11.7
	EN(A,D)4X30*14**		27400	TXV			13	10.8
	EN(A,D)4X30*17**	*8MV*0901716**	27400	TDR&TXV	14			11.7
	EN(A,D)4X30*17**	*8MX*0701716**	27400	TDR&TXV	14			11.5
	EN(A,D)4X30*17**	*9MA*0601714A**	27400	TDR&TXV	14			11.5
	EN(A,D)4X30*17**	*9MA*0801714A**	27400	TDR&TXV	14.2			11.8
	EN(A,D)4X30*17**	*9MV*0601714A**	27400	TDR&TXV	14			11.5
	EN(A,D)4X30*17**	*9MV*0801716A**	27400	TDR&TXV	14.2			11.8
	EN(A,D)4X30*17**	*9MX*0601714A**	27600	TDR&TXV	14			11.5
	EN(A,D)4X30*17**	*9MX*0801716A**	27600	TDR&TXV	14			11.5
	EN(A,D)4X30*17**		27400	TXV			13	10.9
	EN(A,D)4X31*17**	*9MA*0601714A**	27800	TDR&TXV	14.2			11.8
	EN(A,D)4X31*17**	*9MA*0801714A**	28000	TDR&TXV	14.5			12
	EN(A,D)4X31*17**	*9MV*0601714A**	28000	TDR&TXV	14.2			11.8
	EN(A,D)4X31*17**	*9MV*0801716A**	28000	TDR&TXV	14.5			12
	EN(A,D)4X31*17**	*9MX*0601714A**	28200	TDR&TXV	14.2			11.8
	EN(A,D)4X31*17**	*9MX*0801716A**	28400	TDR&TXV	14.2			11.8
	EN(A,D)4X36*21**	*8MV*1102120**	27400	TDR&TXV	14			11.7
	EN(A,D)4X36*21**	*8MX*0902116**	27600	TDR&TXV	14			11.7
	EN(A,D)4X36*21**	*9MA*0601714A**	27400	TDR&TXV	14			11.5
	EN(A,D)4X36*21**	*9MA*0801714A**	27400	TDR&TXV	14.2			11.8
	EN(A,D)4X36*21**	*9MA*0802120A**	27600	TDR&TXV	14			11.5
	EN(A,D)4X36*21**	*9MA*1002122A**	27600	TDR&TXV	14.5			12
	EN(A,D)4X36*21**	*9MAC0602120A**	27400	TDR&TXV	14			11.5
	EN(A,D)4X36*21**	*9MV*0601714A**	27400	TDR&TXV	14			11.5
	EN(A,D)4X36*21**	*9MV*0801716A**	27400	TDR&TXV	14.2			11.8
	EN(A,D)4X36*21**	*9MV*0802120A**	27400	TDR&TXV	14.5			11.7
	EN(A,D)4X36*21**	*9MV*1002120A**	27200	TDR&TXV	14.5			12
	EN(A,D)4X36*21**	*9MX*0601714A**	27600	TDR&TXV	14			11.5
	EN(A,D)4X36*21**	*9MX*0801716A**	27800	TDR&TXV	14			11.5

COOLING PERFORMANCE FOR COMBINATION RATINGS Indoor Models

For complete ratings information, use the AHRI website directory search: www.AHRIdirectory.org.
New ratings may be listed online before Specification Sheets are updated.

MODEL	INDOOR MODEL	FURNACE MODEL	AHRI STANDARD RATINGS					
			COOLING					
			CAPACITY BTU/hr	Factory Installed	SEER			EER
STANDARD	TDR	TXV						
R4A330AKA	EN(A,D)4X36*21**	*9MA*1002120A**	27600	TDR&TXV	14.2			11.8
R4A330GKA	EN(A,D)4X36*21**	*9MV*1002116A**	27400	TDR&TXV	14.2			11.8
	EN(A,D)4X36*21**		27400	TXV		13		10.8
	EN(A,D)4X37*17**	*8MV*0701412**	28000	TDR&TXV	14.5			12
	EN(A,D)4X37*17**	*8MV*0901716**	28000	TDR&TXV	14.5			12
	EN(A,D)4X37*17**	*8MX*0701716**	28000	TDR&TXV	14.5			12
	EN(A,D)4X37*17**	*9MA*0601714A**	28200	TDR&TXV	14.5			12
	EN(A,D)4X37*17**	*9MA*0801714A**	28400	TDR&TXV	14.5			12
	EN(A,D)4X37*17**	*9MV*0601714A**	28200	TDR&TXV	14.5			12
	EN(A,D)4X37*17**	*9MV*0801716A**	28400	TDR&TXV	14.5			12
	EN(A,D)4X37*17**	*9MX*0601714A**	28400	TDR&TXV	14.5			12
	EN(A,D)4X37*17**	*9MX*0801716A**	28600	TDR&TXV	14.5			12
	EN(A,D)4X37*17**	MV08B15**B*	28000	TDR&TXV	14.5			12
	EN(A,D)4X37*17**	NOMV106D12*	28000	TDR&TXV	14.5			12
	EN(A,D)4X37*17**		28000	TXV		13		11
	EN(A,D,W)4X36*17**	*8MV*0901716**	27400	TDR&TXV	14			11.7
	EN(A,D,W)4X36*17**	*8MX*0701716**	27400	TDR&TXV	14			11.5
	EN(A,D,W)4X36*17**	*9MA*0601714A**	27400	TDR&TXV	14			11.5
	EN(A,D,W)4X36*17**	*9MA*0801714A**	27400	TDR&TXV	14.2			11.8
	EN(A,D,W)4X36*17**	*9MV*0601714A**	27400	TDR&TXV	14			11.5
	EN(A,D,W)4X36*17**	*9MV*0801716A**	27400	TDR&TXV	14.2			11.8
	EN(A,D,W)4X36*17**	*9MX*0601714A**	27600	TDR&TXV	14			11.5
	EN(A,D,W)4X36*17**	*9MX*0801716A**	27600	TDR&TXV	14			11.5
	EN(A,D,W)4X36*17**		27400	TXV		13		10.8
	EN(A,D,W)4X42*21**	*9MA*0802120A**	27800	TDR&TXV	14.5			12
	EN(A,D,W)4X42*21**	*9MA*1002122A**	28000	TDR&TXV	14.5			12
	EN(A,D,W)4X42*21**	*9MAC0602120A**	27800	TDR&TXV	14			11.5
	EN(A,D,W)4X42*21**	*9MV*0802120A**	27800	TDR&TXV	14.5			12
	EN(A,D,W)4X42*21**	*9MV*1002120A**	27600	TDR&TXV	14.5			12
	EN(A,D,W)4X42*21**	*9MV*1002116A**	27800	TDR&TXV	14.2			11.8
	EN(A,D,W)4X42*21**		27600	TXV		13		11
	EN(A,D,W)4X48*21**	*8MX*0902116**	28400	TDR&TXV	14.5			12.2
	END4X42*17**	*8MV*0901716**	27800	TDR&TXV	14.5			12.1
	END4X42*17**		27600	TXV		13		11
	ENH4X30*17**	*8MV*0701412**	27200	TDR&TXV	14			11.7
	ENH4X30*17**	*8MV*0901716**	27400	TDR&TXV	14			11.7
	ENH4X30*17**	*8MV*1102120**	27400	TDR&TXV	14			11.7
	ENH4X30*17**	*8MV*1352422**	27400	TDR&TXV	14			12
	ENH4X30*17**	*8MX*0701716**	27400	TDR&TXV	14			11.5
	ENH4X30*17**	*8MX*0902116**	27600	TDR&TXV	14			11.7
	ENH4X30*17**	*9MA*0601714A**	27400	TDR&TXV	14			11.5
	ENH4X30*17**	*9MA*0801714A**	27400	TDR&TXV	14.2			11.8
	ENH4X30*17**	*9MA*1202422A**	27600	TDR&TXV	14.2			11.8
	ENH4X30*17**	*9MV*0601714A**	27400	TDR&TXV	14			11.5
	ENH4X30*17**	*9MV*0801716A**	27400	TDR&TXV	14.2			11.8
	ENH4X30*17**	*9MV*1202422A**	27600	TDR&TXV	14.5			12
	ENH4X30*17**	*9MX*0601714A**	27600	TDR&TXV	14			11.5
	ENH4X30*17**	*9MX*0801716A**	27600	TDR&TXV	14			11.5
	ENH4X30*17**	*9MA*1002120A**	27600	TDR&TXV	14.2			11.8
	ENH4X30*17**	*9MV*1002116A**	27400	TDR&TXV	14.2			11.8

COOLING PERFORMANCE FOR COMBINATION RATINGS Indoor Models

For complete ratings information, use the AHRI website directory search: www.AHRIdirectory.org.
 New ratings may be listed online before Specification Sheets are updated.

MODEL	INDOOR MODEL	FURNACE MODEL	AHRI STANDARD RATINGS					
			COOLING					
			CAPACITY BTU/hr	Factory Installed	SEER			EER
STANDARD	TDR	TXV						
R4A330AKA	ENH4X30*17**		27400	TXV		13		10.9
R4A330GKA	ENH4X31*17**	*9MA*0601714A**	27800	TDR&TXV	14.2			11.8
	ENH4X31*17**	*9MA*0801714A**	28000	TDR&TXV	14.5			12
	ENH4X31*17**	*9MA*1202422A**	28200	TDR&TXV	14.5			12
	ENH4X31*17**	*9MV*0601714A**	28000	TDR&TXV	14.2			11.8
	ENH4X31*17**	*9MV*0801716A**	28000	TDR&TXV	14.5			12
	ENH4X31*17**	*9MV*1202422A**	28200	TDR&TXV	14.5			12
	ENH4X31*17**	*9MX*0601714A**	28200	TDR&TXV	14.2			11.8
	ENH4X31*17**	*9MX*0801716A**	28400	TDR&TXV	14.2			11.8
	ENH4X31*17**	*9MA*1002120A**	28200	TDR&TXV	14.5			12
	ENH4X31*17**	*9MV*1002116A**	28000	TDR&TXV	14.5			12
	ENH4X36*17**	*8MV*0701412**	27400	TDR&TXV	14			11.7
	ENH4X36*17**	*8MV*0901716**	27400	TDR&TXV	14			11.7
	ENH4X36*17**	*8MV*1102120**	27400	TDR&TXV	14			11.7
	ENH4X36*17**	*8MV*1352422**	27400	TDR&TXV	14			12
	ENH4X36*17**	*8MX*0701716**	27400	TDR&TXV	14			11.5
	ENH4X36*17**	*8MX*0902116**	27600	TDR&TXV	14			11.7
	ENH4X36*17**	*9MA*0601714A**	27400	TDR&TXV	14			11.5
	ENH4X36*17**	*9MA*0801714A**	27400	TDR&TXV	14.2			11.8
	ENH4X36*17**	*9MA*1202422A**	27600	TDR&TXV	14.2			11.8
	ENH4X36*17**	*9MV*0601714A**	27400	TDR&TXV	14			11.5
	ENH4X36*17**	*9MV*0801716A**	27400	TDR&TXV	14.2			11.8
	ENH4X36*17**	*9MV*1202422A**	27600	TDR&TXV	14.5			12
	ENH4X36*17**	*9MX*0601714A**	27600	TDR&TXV	14			11.5
	ENH4X36*17**	*9MX*0801716A**	27600	TDR&TXV	14			11.5
	ENH4X36*17**	*9MA*1002120A**	27600	TDR&TXV	14.2			11.8
	ENH4X36*17**	*9MV*1002116A**	27400	TDR&TXV	14.2			11.8
	ENH4X36*17**		27400	TXV		13		10.8
	ENH4X42*21**		27600	TXV		13		11

* Tested Combo

COOLING PERFORMANCE FOR COMBINATION RATINGS Indoor Models

For complete ratings information, use the AHRI website directory search: www.AHRIdirectory.org.
New ratings may be listed online before Specification Sheets are updated.

MODEL	INDOOR MODEL	FURNACE MODEL	AHRI STANDARD RATINGS					
			COOLING					
			CAPACITY BTU/hr	Factory Installed	SEER			EER
STANDARD	TDR	TXV						
R4A336AKA	*ED*4X48J**		34000	TXV		13		11
R4A336GKA	FEA4X36**A*		33000	TDR&TXV	13.5			11.5
	FEM4P36**A*		33200	TDR			13.5	11
	FEM4P42**A*		33000	TDR			13	11
	FEM4P48**A*		34400	TDR			14	11.5
	FEM4X36****		34000	TDR&TXV	13.5			11
	FEM4X42****		33400	TDR&TXV	13.5			11
	FEM4X48****		34000	TDR&TXV	13			11
	FS(M,U)4P36**A*		33600	TDR			13	11
	FS(M,U)4P42**A*		34000	TDR			13.5	11
	FS(M,U)4X48****		34000	TDR&TXV	13			11
	FVM4X24****		33200	TDR&TXV	13.5			11
	FVM4X36****		33400	TDR&TXV	14			11.5
	FVM4X48****		34000	TDR&TXV	14			12
	FVM4X60****		34800	TDR&TXV	14.5			12
	FXM4X36**A*		34400	TDR&TXV	14			11.5
	FXM4X42**A*		34400	TDR&TXV	14			11.5
	FXM4X48**A*		35000	TDR&TXV	14.5			12
	EA*4X36*14A*	*8MV*0701412**	33000	TDR&TXV	13.7			11.3
	EA*4X36*14A*	*8MX*0451408**	32800	TDR&TXV	13			11
	EA*4X36*17A*	*8MV*0701412**	33000	TDR&TXV	13.7			11.3
	EA*4X36*17A*	*8MV*0901716**	33200	TDR&TXV	14			11.5
	EA*4X36*17A*	*8MX*0451408**	33000	TDR&TXV	13.2			11
	EA*4X36*17A*	*8MX*0701716**	33000	TDR&TXV	13.5			11.2
	EA*4X36*17A*	*9MA*0601714A**	32600	TDR&TXV	13.7			11.4
	EA*4X36*17A*	*9MA*0801714A**	32800	TDR&TXV	14			11.5
	EA*4X36*17A*	*9MV*0601714A**	33000	TDR&TXV	13.7			11.4
	EA*4X36*17A*	*9MV*0801716A**	33200	TDR&TXV	13.7			11.4
	EA*4X36*17A*	*9MX*0601714A**	33000	TDR&TXV	13.7			11.4
	EA*4X36*17A*	*9MX*0801716A**	33000	TDR&TXV	13.7			11.4
	EA*4X36*21A*	*8MV*0901716**	33200	TDR&TXV	14			11.5
	EA*4X36*21A*	*8MV*1102120**	33200	TDR&TXV	14			11.5
	EA*4X36*21A*	*8MX*0701716**	33200	TDR&TXV	13.7			11.3
	EA*4X36*21A*	*8MX*0902116**	33400	TDR&TXV	14			11.7
	EA*4X36*21A*	*8MX*1102120**	33600	TDR&TXV	14			11.7
	EA*4X36*21A*	*9MA*0601714A**	32800	TDR&TXV	13.7			11.4
	EA*4X36*21A*	*9MA*0801714A**	32800	TDR&TXV	14			11.5
	EA*4X36*21A*	*9MA*0802120A**	33000	TDR&TXV	14			11.7
	EA*4X36*21A*	*9MA*1002122A**	33200	TDR&TXV	14.2			11.8
	EA*4X36*21A*	*9MAC0602120A**	32800	TDR&TXV	13.7			11.5
	EA*4X36*21A*	*9MV*0601714A**	33000	TDR&TXV	13.7			11.4
	EA*4X36*21A*	*9MV*0801716A**	33200	TDR&TXV	14			11.5
	EA*4X36*21A*	*9MV*0802120A**	33200	TDR&TXV	14			11.5
	EA*4X36*21A*	*9MV*1002120A**	33200	TDR&TXV	14			11.7
	EA*4X36*21A*	*9MX*0601714A**	33200	TDR&TXV	13.7			11.4
	EA*4X36*21A*	*9MX*0801716A**	33200	TDR&TXV	14			11.5
	EA*4X36*21A*	*9MA*1002120A**	33000	TDR&TXV	14.2			11.8
	EA*4X36*21A*	*9MV*1002116A**	33200	TDR&TXV	14			11.5
	EA*4X42*21A*	*8MV*0901716**	33400	TDR&TXV	14			11.7

COOLING PERFORMANCE FOR COMBINATION RATINGS Indoor Models

For complete ratings information, use the AHRI website directory search: www.AHRIdirectory.org.
 New ratings may be listed online before Specification Sheets are updated.

MODEL	INDOOR MODEL	FURNACE MODEL	AHRI STANDARD RATINGS					
			COOLING					
			CAPACITY BTU/hr	Factory Installed	SEER			EER
STANDARD	TDR	TXV						
R4A336AKA	EA*4X42*21A*	*8MV*1102120**	33400	TDR&TXV	14			11.7
R4A336GKA	EA*4X42*21A*	*8MX*0701716**	33400	TDR&TXV	13.7			11.3
	EA*4X42*21A*	*8MX*0902116**	33600	TDR&TXV	14			11.7
	EA*4X42*21A*	*8MX*1102120**	33800	TDR&TXV	14			11.7
	EA*4X42*21A*	*9MA*0601714A**	33000	TDR&TXV	14			11.5
	EA*4X42*21A*	*9MA*0801714A**	33200	TDR&TXV	14.2			11.7
	EA*4X42*21A*	*9MA*0802120A**	33200	TDR&TXV	14.5			12
	EA*4X42*21A*	*9MA*1002122A**	33400	TDR&TXV	14.5			12
	EA*4X42*21A*	*9MAC0602120A**	33200	TDR&TXV	14			11.5
	EA*4X42*21A*	*9MV*0601714A**	33400	TDR&TXV	13.7			11.4
	EA*4X42*21A*	*9MV*0801716A**	33400	TDR&TXV	14			11.5
	EA*4X42*21A*	*9MV*0802120A**	33400	TDR&TXV	14			11.7
	EA*4X42*21A*	*9MV*1002120A**	33400	TDR&TXV	14			11.7
	EA*4X42*21A*	*9MX*0601714A**	33400	TDR&TXV	13.7			11.4
	EA*4X42*21A*	*9MX*0801716A**	33400	TDR&TXV	14			11.5
	EA*4X42*21A*	*9MA*1002120A**	33200	TDR&TXV	14.2			11.8
	EA*4X42*21A*	*9MV*1002116A**	33600	TDR&TXV	14			11.5
	EA*4X42*24A*	*8MV*1102120**	33400	TDR&TXV	14			11.7
	EA*4X42*24A*	*8MV*1352422**	33400	TDR&TXV	14			11.7
	EA*4X42*24A*	*8MX*0902116**	33800	TDR&TXV	14			11.7
	EA*4X42*24A*	*8MX*1102120**	33800	TDR&TXV	14			11.7
	EA*4X42*24A*	*9MA*0802120A**	33200	TDR&TXV	14.5			12
	EA*4X42*24A*	*9MA*1002122A**	33400	TDR&TXV	14.5			12
	EA*4X42*24A*	*9MA*1202422A**	33200	TDR&TXV	14.5			12
	EA*4X42*24A*	*9MAC0602120A**	33200	TDR&TXV	14			11.5
	EA*4X42*24A*	*9MV*0802120A**	33400	TDR&TXV	14			11.7
	EA*4X42*24A*	*9MV*1002120A**	33400	TDR&TXV	14.5			12
	EA*4X42*24A*	*9MV*1202422A**	33600	TDR&TXV	14.2			11.8
	EA*4X42*24A*	*9MA*1002120A**	33200	TDR&TXV	14.2			11.8
	EA*4X42*24A*	*9MV*1002116A**	33600	TDR&TXV	14.2			11.8
	EA*4X48*21A*	*9MA*0802120A**	33800	TDR&TXV	14.5			12
	EA*4X48*21A*	*9MA*1002122A**	33800	TDR&TXV	14.5			12
	EA*4X48*21A*	*9MAC0602120A**	33600	TDR&TXV	14			11.7
	EA*4X48*21A*	*9MV*0802120A**	33800	TDR&TXV	14.5			12
	EA*4X48*21A*	*9MV*1002120A**	33800	TDR&TXV	14.5			12
	EHD4X36A**	*8MV*0701412**	33600	TDR&TXV	14			11.5
	EHD4X36A**	*8MV*0901716**	33600	TDR&TXV	14			11.5
	EHD4X36A**	*8MV*1102120**	33800	TDR&TXV	14			11.5
	EHD4X36A**	*8MV*1352422**	33600	TDR&TXV	14			11.5
	EHD4X36A**	*8MX*0451408**	33600	TDR&TXV	13			11
	EHD4X36A**	*8MX*0701716**	33600	TDR&TXV	13			11
	EHD4X36A**	*8MX*0902116**	34000	TDR&TXV	14			11.5
	EHD4X36A**	*8MX*1102120**	34000	TDR&TXV	14.5			12
	EHD4X36A**	*9MA*0601714A**	33400	TDR&TXV	14			11.5
	EHD4X36A**	*9MA*0801714A**	33600	TDR&TXV	14.2			11.8
	EHD4X36A**	*9MA*0802120A**	33600	TDR&TXV	14.5			12
	EHD4X36A**	*9MA*1002122A**	33800	TDR&TXV	14.5			12
	EHD4X36A**	*9MA*1202422A**	33600	TDR&TXV	14.5			12

COOLING PERFORMANCE FOR COMBINATION RATINGS Indoor Models

For complete ratings information, use the AHRI website directory search: www.AHRIdirectory.org.
 New ratings may be listed online before Specification Sheets are updated.

MODEL	INDOOR MODEL	FURNACE MODEL	AHRI STANDARD RATINGS					
			COOLING					
			CAPACITY BTU/hr	Factory Installed	SEER			EER
STANDARD	TDR	TXV						
R4A336AKA	EHD4X36A**	*9MAC0602120A**	33600	TDR&TXV	14			11.5
R4A336GKA	EHD4X36A**	*9MV*0601714A**	33600	TDR&TXV	13.7			11.4
	EHD4X36A**	*9MV*0801716A**	33800	TDR&TXV	14.2			11.8
	EHD4X36A**	*9MV*0802120A**	33800	TDR&TXV	14.5			12
	EHD4X36A**	*9MV*1002120A**	33800	TDR&TXV	14.5			12
	EHD4X36A**	*9MV*1202422A**	33800	TDR&TXV	14.5			12
	EHD4X36A**	*9MX*0601714A**	33800	TDR&TXV	14			11.5
	EHD4X36A**	*9MX*0801716A**	33800	TDR&TXV	14.2			11.8
	EHD4X36A**	MV08B15**B*	33800	TDR&TXV	14.5			12
	EHD4X36A**	MV12F19**B*	34000	TDR&TXV	14.5			12
	EHD4X36A**	MV16J22**B*	34000	TDR&TXV	14.5			12
	EHD4X36A**	MV20L24**B*	34000	TDR&TXV	14.5			12
	EHD4X36A**	NOMV106D12*	33400	TDR&TXV	14			11.5
	EHD4X36A**	NOMV156E19*	33600	TDR&TXV	14			11.5
	EHD4X36A**	*9MA*1002120A**	33600	TDR&TXV	14.2			11.8
	EHD4X36A**	*9MV*1002116A**	33800	TDR&TXV	14.2			11.8
	EHD4X36A**		33800	TXV		13		11
	EHD4X42A**	*8MV*0701412**	33800	TDR&TXV	14			11.5
	EHD4X42A**	*8MV*0901716**	34000	TDR&TXV	14			11.5
	EHD4X42A**	*8MV*1102120**	33800	TDR&TXV	14			11.5
	EHD4X42A**	*8MV*1352422**	33800	TDR&TXV	14.5			12
	EHD4X42A**	*8MX*0451408**	33800	TDR&TXV	13			11
	EHD4X42A**	*8MX*0701716**	33800	TDR&TXV	13			11
	EHD4X42A**	*8MX*0902116**	34200	TDR&TXV	14.5			12
	EHD4X42A**	*8MX*1102120**	34200	TDR&TXV	14.5			12
	EHD4X42A**	*9MA*0601714A**	33600	TDR&TXV	14.2			11.8
	EHD4X42A**	*9MA*0801714A**	33600	TDR&TXV	14.2			11.8
	EHD4X42A**	*9MA*0802120A**	33800	TDR&TXV	14.5			12
	EHD4X42A**	*9MA*1002122A**	34000	TDR&TXV	14.5			12
	EHD4X42A**	*9MA*1202422A**	33800	TDR&TXV	14.5			12
	EHD4X42A**	*9MAC0602120A**	33600	TDR&TXV	14.2			11.8
	EHD4X42A**	*9MV*0601714A**	33800	TDR&TXV	14			11.5
	EHD4X42A**	*9MV*0801716A**	34000	TDR&TXV	14.2			11.8
	EHD4X42A**	*9MV*0802120A**	34000	TDR&TXV	14.5			12
	EHD4X42A**	*9MV*1002120A**	34000	TDR&TXV	14.5			12
	EHD4X42A**	*9MV*1202422A**	34000	TDR&TXV	14.5			12
	EHD4X42A**	*9MX*0601714A**	34000	TDR&TXV	14			11.5
	EHD4X42A**	*9MX*0801716A**	34000	TDR&TXV	14.2			11.8
	EHD4X42A**	MV08B15**B*	33400	TDR&TXV	14			11.5
	EHD4X42A**	MV12F19**B*	33400	TDR&TXV	14			12
	EHD4X42A**	MV16J22**B*	33400	TDR&TXV	14			12
	EHD4X42A**	MV20L24**B*	33400	TDR&TXV	14			12
	EHD4X42A**	NOMV106D12*	33600	TDR&TXV	14			11.5
	EHD4X42A**	NOMV156E19*	33800	TDR&TXV	14			11.5
	EHD4X42A**	*9MA*1002120A**	33800	TDR&TXV	14.2			11.8
	EHD4X42A**	*9MV*1002116A**	34000	TDR&TXV	14.2			11.8
	EHD4X42A**		34000	TXV		13		11
	EHD4X48A**	MV12F19**B*	33400	TDR&TXV	14			12
	EHD4X48A**	MV16J22**B*	33400	TDR&TXV	14			12
	EHD4X48A**	MV20L24**B*	33400	TDR&TXV	14			12

COOLING PERFORMANCE FOR COMBINATION RATINGS Indoor Models

For complete ratings information, use the AHRI website directory search: www.AHRIdirectory.org.
 New ratings may be listed online before Specification Sheets are updated.

MODEL	INDOOR MODEL	FURNACE MODEL	AHRI STANDARD RATINGS					
			COOLING					
			CAPACITY BTU/hr	Factory Installed	SEER			EER
STANDARD	TDR	TXV						
R4A336AKA	EHD4X48A**	*9MVX060	33400	TDR&TXV	13.5			11
R4A336GKA	EHD4X48A**	*9MVX080	33400	TDR&TXV	13.5			11
	EHD4X48A**	*9MVX100	33400	TDR&TXV	14			12
	EHD4X48A**		34000	TXV		13		11
	EMA4X48D**		34000	TXV		13		11
	EN(A,D)4X36*21**	*8MV*0901716**	33000	TDR&TXV	13.5			11
	EN(A,D)4X36*21**	*8MV*1102120**	33000	TDR&TXV	13.5			11
	EN(A,D)4X36*21**	*8MX*0701716**	33000	TDR&TXV	13.5			11
	EN(A,D)4X36*21**	*8MX*0902116**	33200	TDR&TXV	14			11.5
	EN(A,D)4X36*21**	*8MX*1102120**	33200	TDR&TXV	14			11.5
	EN(A,D)4X36*21**	*9MA*0601714A**	32600	TDR&TXV	13.7			11.4
	EN(A,D)4X36*21**	*9MA*0801714A**	32800	TDR&TXV	13.7			11.4
	EN(A,D)4X36*21**	*9MA*0802120A**	33000	TDR&TXV	14			11.5
	EN(A,D)4X36*21**	*9MA*1002122A**	33000	TDR&TXV	14			11.5
	EN(A,D)4X36*21**	*9MAC0602120A**	32800	TDR&TXV	13.7			11.4
	EN(A,D)4X36*21**	*9MV*0601714A**	32800	TDR&TXV	13.5			11.2
	EN(A,D)4X36*21**	*9MV*0801716A**	33000	TDR&TXV	13.7			11.4
	EN(A,D)4X36*21**	*9MV*0802120A**	33000	TDR&TXV	14			11.5
	EN(A,D)4X36*21**	*9MV*1002120A**	33000	TDR&TXV	14			11.5
	EN(A,D)4X36*21**	*9MX*0601714A**	33000	TDR&TXV	13.7			11.4
	EN(A,D)4X36*21**	*9MX*0801716A**	33000	TDR&TXV	13.7			11.4
	EN(A,D)4X36*21**	MV12F19**B*	33200	TDR&TXV	14			11.5
	EN(A,D)4X36*21**	NOMV106D12*	32600	TDR&TXV	13.5			11
	EN(A,D)4X36*21**	NOMV156E19*	32800	TDR&TXV	13.5			11
	EN(A,D)4X36*21**	*9MA*1002120A**	32800	TDR&TXV	14			11.5
	EN(A,D)4X36*21**	*9MV*1002116A**	33000	TDR&TXV	13.7			11.4
	EN(A,D)4X37*17**	*8MV*0701412**	34000	TDR&TXV	14			11.5
	EN(A,D)4X37*17**	*8MV*0901716**	34000	TDR&TXV	14			11.5
	EN(A,D)4X37*17**	*8MX*0451408**	34000	TDR&TXV	13.5			11
	EN(A,D)4X37*17**	*8MX*0701716**	34200	TDR&TXV	14			11.5
	EN(A,D)4X37*17**	*9MA*0601714A**	33800	TDR&TXV	14.2			11.8
	EN(A,D)4X37*17**	*9MA*0801714A**	34000	TDR&TXV	14.2			11.8
	EN(A,D)4X37*17**	*9MV*0601714A**	34200	TDR&TXV	14			11.5
	EN(A,D)4X37*17**	*9MV*0801716A**	34000	TDR&TXV	14.5			12
	EN(A,D)4X37*17**	*9MX*0601714A**	34200	TDR&TXV	14			11.5
	EN(A,D)4X37*17**	*9MX*0801716A**	34200	TDR&TXV	14.2			11.8
	EN(A,D)4X37*17**	MV08B15**B*	34200	TDR&TXV	14			11.5
	EN(A,D)4X37*17**	NOMV106D12*	33800	TDR&TXV	14			11.5
	EN(A,D)4X37*17**		34400	TXV		13		11
	EN(A,D)4X43*24**	*8MV*1102120**	34000	TDR&TXV	14			12
	EN(A,D)4X43*24**	*8MV*1352422**	34200	TDR&TXV	14.5			12
	EN(A,D)4X43*24**	*8MX*0902116**	34000	TDR&TXV	14.5			12
	EN(A,D)4X43*24**	*8MX*1102120**	34000	TDR&TXV	14.5			12
	EN(A,D)4X43*24**	*9MA*0802120A**	34200	TDR&TXV	14.5			12
	EN(A,D)4X43*24**	*9MA*1002122A**	34400	TDR&TXV	14.5			12
	EN(A,D)4X43*24**	*9MA*1202422A**	34200	TDR&TXV	14.5			12
	EN(A,D)4X43*24**	*9MAC0602120A**	34000	TDR&TXV	14.5			12
	EN(A,D)4X43*24**	*9MV*0802120A**	34400	TDR&TXV	14.5			12
	EN(A,D)4X43*24**	*9MV*1002120A**	34400	TDR&TXV	14.5			12
	EN(A,D)4X43*24**	*9MV*1202422A**	34200	TDR&TXV	14.5			12
	EN(A,D)4X43*24**	MV16J22**B*	34200	TDR&TXV	14.5			12

COOLING PERFORMANCE FOR COMBINATION RATINGS Indoor Models

For complete ratings information, use the AHRI website directory search: www.AHRIdirectory.org.
New ratings may be listed online before Specification Sheets are updated.

MODEL	INDOOR MODEL	FURNACE MODEL	AHRI STANDARD RATINGS					
			COOLING					
			CAPACITY BTU/hr	Factory Installed	SEER			EER
STANDARD	TDR	TXV						
R4A336AKA	EN(A,D)4X43*24**	MV20L24**B*	34200	TDR&TXV	14.5			12
R4A336GKA	EN(A,D)4X43*24**	NOMV156E19*	34000	TDR&TXV	14.5			12
	EN(A,D)4X43*24**	*9MA*1002120A**	34200	TDR&TXV	14.5			12
	EN(A,D)4X43*24**	*9MV*1002116A**	34200	TDR&TXV	14.5			12
	EN(A,D)4X43*24**		34200	TXV		13		11
	EN(A,D,W)4X36*17**	*8MV*0701412**	33000	TDR&TXV	13			11
	EN(A,D,W)4X36*17**	*8MV*0901716**	33000	TDR&TXV	13.5			11
	EN(A,D,W)4X36*17**	*8MX*0451408**	33000	TDR&TXV	13			11
	EN(A,D,W)4X36*17**	*8MX*0701716**	33000	TDR&TXV	13			11
	EN(A,D,W)4X36*17**	*9MA*0601714A**	32600	TDR&TXV	13.7			11.4
	EN(A,D,W)4X36*17**	*9MA*0801714A**	32800	TDR&TXV	13.7			11.4
	EN(A,D,W)4X36*17**	*9MV*0601714A**	32800	TDR&TXV	13.5			11.2
	EN(A,D,W)4X36*17**	*9MV*0801716A**	33000	TDR&TXV	13.7			11.4
	EN(A,D,W)4X36*17**	*9MX*0601714A**	33000	TDR&TXV	13.7			11.4
	EN(A,D,W)4X36*17**	*9MX*0801716A**	33000	TDR&TXV	13.7			11.4
	EN(A,D,W)4X36*17**	MV08B15**B*	33200	TDR&TXV	13.5			11.5
	EN(A,D,W)4X36*17**	NOMV106D12*	32600	TDR&TXV	13			11
	EN(A,D,W)4X42*21**	*8MV*0901716**	33200	TDR&TXV	14			11.5
	EN(A,D,W)4X42*21**	*8MV*1102120**	33200	TDR&TXV	14			11.5
	EN(A,D,W)4X42*21**	*8MX*0701716**	33200	TDR&TXV	13			11
	EN(A,D,W)4X42*21**	*8MX*0902116**	33200	TDR&TXV	14			11.5
	EN(A,D,W)4X42*21**	*8MX*1102120**	33600	TDR&TXV	14			11.5
	EN(A,D,W)4X42*21**	*9MA*0601714A**	33000	TDR&TXV	13.7			11.4
	EN(A,D,W)4X42*21**	*9MA*0801714A**	33200	TDR&TXV	14			11.5
	EN(A,D,W)4X42*21**	*9MA*0802120A**	33200	TDR&TXV	14			11.7
	EN(A,D,W)4X42*21**	*9MA*1002122A**	33400	TDR&TXV	14.2			11.7
	EN(A,D,W)4X42*21**	*9MAC0602120A**	33200	TDR&TXV	14			11.5
	EN(A,D,W)4X42*21**	*9MV*0601714A**	33200	TDR&TXV	13.7			11.4
	EN(A,D,W)4X42*21**	*9MV*0801716A**	33400	TDR&TXV	14			11.5
	EN(A,D,W)4X42*21**	*9MV*0802120A**	33400	TDR&TXV	14			11.5
	EN(A,D,W)4X42*21**	*9MV*1002120A**	33400	TDR&TXV	14			11.7
	EN(A,D,W)4X42*21**	*9MX*0601714A**	33400	TDR&TXV	13.7			11.4
	EN(A,D,W)4X42*21**	*9MX*0801716A**	33400	TDR&TXV	14			11.5
	EN(A,D,W)4X42*21**	MV12F19**B*	33600	TDR&TXV	14			12
	EN(A,D,W)4X42*21**	NOMV106D12*	33000	TDR&TXV	13.5			11
	EN(A,D,W)4X42*21**	NOMV156E19*	33200	TDR&TXV	14			11.5
	EN(A,D,W)4X42*21**	*9MA*1002120A**	33200	TDR&TXV	14.2			11.7
	EN(A,D,W)4X42*21**	*9MV*1002116A**	33400	TDR&TXV	14			11.5
	EN(A,D,W)4X48*21**	*9MA*0802120A**	33800	TDR&TXV	14.5			12
	EN(A,D,W)4X48*21**	*9MA*1002122A**	34000	TDR&TXV	14.5			12
	EN(A,D,W)4X48*21**	*9MAC0602120A**	33600	TDR&TXV	14			11.7
	EN(A,D,W)4X48*21**	*9MV*0802120A**	34000	TDR&TXV	14.5			12
	EN(A,D,W)4X48*21**	*9MV*1002120A**	34000	TDR&TXV	14.5			12
	EN(A,D,W)4X48*21**	*9MV*1002116A**	34200	TDR&TXV	14.2			11.8
	END4X42*17**	*8MV*0701412**	33400	TDR&TXV	13.5			11
	END4X42*17**	*8MV*0901716**	33200	TDR&TXV	14			11.5
	END4X42*17**	*8MX*0451408**	33200	TDR&TXV	13			11
	END4X42*17**	*8MX*0701716**	33200	TDR&TXV	13			11
	END4X42*17**	*9MA*0601714A**	33200	TDR&TXV	14			11.5
	END4X42*17**	*9MA*0801714A**	33400	TDR&TXV	14.2			11.8
	END4X42*17**	*9MV*0601714A**	33600	TDR&TXV	13.7			11.4

COOLING PERFORMANCE FOR COMBINATION RATINGS Indoor Models

For complete ratings information, use the AHRI website directory search: www.AHRIdirectory.org.
New ratings may be listed online before Specification Sheets are updated.

MODEL	INDOOR MODEL	FURNACE MODEL	AHRI STANDARD RATINGS					
			COOLING					
			CAPACITY BTU/hr	Factory Installed	SEER			EER
STANDARD	TDR	TXV						
R4A336AKA	END4X42*17**	*9MV*0801716A**	33600	TDR&TXV	14			11.5
R4A336GKA	END4X42*17**	*9MX*0601714A**	33600	TDR&TXV	13.7			11.4
	END4X42*17**	*9MX*0801716A**	33600	TDR&TXV	14			11.5
	END4X42*17**	MV08B15**B*	33800	TDR&TXV	14			11.5
	END4X42*17**	NOMV106D12*	33200	TDR&TXV	13.5			11
	END4X42*17**		33800	TXV		13		11
	ENH4X36*17**	*8MV*0701412**	32800	TDR&TXV	13			11
	ENH4X36*17**	*8MV*0901716**	33000	TDR&TXV	13.5			11
	ENH4X36*17**	*8MV*1102120**	33000	TDR&TXV	13.5			11
	ENH4X36*17**	*8MV*1352422**	33000	TDR&TXV	13.5			11
	ENH4X36*17**	*8MX*0451408**	32800	TDR&TXV	13			11
	ENH4X36*17**	*8MX*0701716**	32800	TDR&TXV	13			11
	ENH4X36*17**	*8MX*0902116**	33000	TDR&TXV	14			11.5
	ENH4X36*17**	*8MX*1102120**	33200	TDR&TXV	14			11.5
	ENH4X36*17**	*9MA*0601714A**	32600	TDR&TXV	13.7			11.4
	ENH4X36*17**	*9MA*0801714A**	32800	TDR&TXV	13.7			11.4
	ENH4X36*17**	*9MA*1202422A**	33000	TDR&TXV	14			11.5
	ENH4X36*17**	*9MV*0601714A**	32800	TDR&TXV	13.5			11.2
	ENH4X36*17**	*9MV*0801716A**	33000	TDR&TXV	13.7			11.4
	ENH4X36*17**	*9MV*1202422A**	33000	TDR&TXV	14.2			11.7
	ENH4X36*17**	*9MX*0601714A**	33000	TDR&TXV	13.7			11.4
	ENH4X36*17**	*9MX*0801716A**	33000	TDR&TXV	13.7			11.4
	ENH4X36*17**	MV08B15**B*	33200	TDR&TXV	13.5			11.5
	ENH4X36*17**	MV12F19**B*	33200	TDR&TXV	14			11.5
	ENH4X36*17**	MV16J22**B*	33000	TDR&TXV	14			11.5
	ENH4X36*17**	MV20L24**B*	33200	TDR&TXV	14			11.5
	ENH4X36*17**	NOMV106D12*	32600	TDR&TXV	13			11
	ENH4X36*17**	NOMV156E19*	32800	TDR&TXV	13			11
	ENH4X36*17**	*9MA*1002120A**	32800	TDR&TXV	13.7			11.4
	ENH4X36*17**	*9MV*1002116A**	33000	TDR&TXV	13.7			11.4
	ENH4X42*21**	*8MV*0701412**	33200	TDR&TXV	13.5			11
	ENH4X42*21**	*8MV*0901716**	33200	TDR&TXV	14			11.5
	ENH4X42*21**	*8MV*1102120**	33200	TDR&TXV	14			11.5
	ENH4X42*21**	*8MV*1352422**	33200	TDR&TXV	14			11.5
	ENH4X42*21**	*8MX*0451408**	33200	TDR&TXV	13			11
	ENH4X42*21**	*8MX*0701716**	33200	TDR&TXV	13			11
	ENH4X42*21**	*8MX*0902116**	33200	TDR&TXV	14			11.5
	ENH4X42*21**	*8MX*1102120**	33600	TDR&TXV	14			11.5
	ENH4X42*21**	*9MA*0601714A**	33000	TDR&TXV	13.7			11.4
	ENH4X42*21**	*9MA*0801714A**	33200	TDR&TXV	14			11.5
	ENH4X42*21**	*9MA*0802120A**	33200	TDR&TXV	14			11.7
	ENH4X42*21**	*9MA*1002122A**	33400	TDR&TXV	14.2			11.7
	ENH4X42*21**	*9MA*1202422A**	33200	TDR&TXV	14.2			11.8
	ENH4X42*21**	*9MAC0602120A**	33200	TDR&TXV	14			11.5
	ENH4X42*21**	*9MV*0601714A**	33200	TDR&TXV	13.7			11.4
	ENH4X42*21**	*9MV*0801716A**	33400	TDR&TXV	14			11.5
	ENH4X42*21**	*9MV*0802120A**	33400	TDR&TXV	14			11.5
	ENH4X42*21**	*9MV*1002120A**	33400	TDR&TXV	14			11.7
	ENH4X42*21**	*9MV*1202422A**	33400	TDR&TXV	14.2			11.8
	ENH4X42*21**	*9MX*0601714A**	33400	TDR&TXV	13.7			11.4
	ENH4X42*21**	*9MX*0801716A**	33400	TDR&TXV	14			11.5

COOLING PERFORMANCE FOR COMBINATION RATINGS Indoor Models

For complete ratings information, use the AHRI website directory search: www.AHRIdirectory.org.
New ratings may be listed online before Specification Sheets are updated.

MODEL	INDOOR MODEL	FURNACE MODEL	AHRI STANDARD RATINGS					
			COOLING					
			CAPACITY BTU/hr	Factory Installed	SEER			EER
STANDARD	TDR	TXV						
R4A336AKA	ENH4X42*21**	MV08B15**B*	33200	TDR&TXV	14			11.5
R4A336GKA	ENH4X42*21**	MV12F19**B*	33600	TDR&TXV	14.5			12
	ENH4X42*21**	MV16J22**B*	33600	TDR&TXV	14.5			12
	ENH4X42*21**	MV20L24**B*	33600	TDR&TXV	14.5			12
	ENH4X42*21**	NOMV106D12*	33000	TDR&TXV	13.5			11
	ENH4X42*21**	NOMV156E19*	33200	TDR&TXV	14			11.5
	ENH4X42*21**	*9MA*1002120A**	33200	TDR&TXV	14.2			11.7
	ENH4X42*21**	*9MV*1002116A**	33400	TDR&TXV	14			11.5
	ENH4X43*21**	*8MV*0701412**	34000	TDR&TXV	14			11.5
	ENH4X43*21**	*8MV*0901716**	34200	TDR&TXV	14.5			12
	ENH4X43*21**	*8MV*1102120**	34200	TDR&TXV	14.5			12
	ENH4X43*21**	*8MV*1352422**	34200	TDR&TXV	14.5			12
	ENH4X43*21**	*8MX*0451408**	34200	TDR&TXV	13			11
	ENH4X43*21**	*8MX*0701716**	34200	TDR&TXV	14			11.5
	ENH4X43*21**	*8MX*0902116**	34200	TDR&TXV	14.5			12
	ENH4X43*21**	*8MX*1102120**	34600	TDR&TXV	14.5			12
	ENH4X43*21**	*9MA*0601714A**	33800	TDR&TXV	14.2			11.8
	ENH4X43*21**	*9MA*0801714A**	34000	TDR&TXV	14.5			12
	ENH4X43*21**	*9MA*0802120A**	34200	TDR&TXV	14.5			12
	ENH4X43*21**	*9MA*1002122A**	34200	TDR&TXV	14.5			12
	ENH4X43*21**	*9MA*1202422A**	34200	TDR&TXV	14.5			12
	ENH4X43*21**	*9MAC0602120A**	34000	TDR&TXV	14.5			12
	ENH4X43*21**	*9MV*0601714A**	33800	TDR&TXV	14.2			11.8
	ENH4X43*21**	*9MV*0801716A**	34000	TDR&TXV	14.5			12
	ENH4X43*21**	*9MV*0802120A**	34400	TDR&TXV	14.5			12
	ENH4X43*21**	*9MV*1002120A**	34400	TDR&TXV	14.5			12
	ENH4X43*21**	*9MV*1202422A**	34000	TDR&TXV	14.5			12
	ENH4X43*21**	*9MX*0601714A**	34400	TDR&TXV	14.2			11.8
	ENH4X43*21**	*9MX*0801716A**	34200	TDR&TXV	14.2			11.8
	ENH4X43*21**	MV08B15**B*	34400	TDR&TXV	14.5			12
	ENH4X43*21**	MV12F19**B*	34400	TDR&TXV	14.5			12
	ENH4X43*21**	MV16J22**B*	34400	TDR&TXV	14.5			12
	ENH4X43*21**	MV20L24**B*	34400	TDR&TXV	14.5			12
	ENH4X43*21**	NOMV106D12*	33800	TDR&TXV	14			11.5
	ENH4X43*21**	NOMV156E19*	34000	TDR&TXV	14.5			12
	ENH4X43*21**	*9MA*1002120A**	34200	TDR&TXV	14.5			12
	ENH4X43*21**	*9MV*1002116A**	34000	TDR&TXV	14.5			12
	ENH4X43*21**		34200	TXV		13		11
	ENH4X48*21**	*9MA*0802120A**	33800	TDR&TXV	14.5			12
	ENH4X48*21**	*9MA*1002122A**	34000	TDR&TXV	14.5			12
	ENH4X48*21**	*9MAC0602120A**	33600	TDR&TXV	14			11.7
	ENH4X48*21**	*9MV*0802120A**	34000	TDR&TXV	14.5			12
	ENH4X48*21**	*9MV*1002120A**	34000	TDR&TXV	14.5			12
	* Tested Combo							

COOLING PERFORMANCE FOR COMBINATION RATINGS Indoor Models

For complete ratings information, use the AHRI website directory search: www.AHRIdirectory.org.
 New ratings may be listed online before Specification Sheets are updated.

MODEL	INDOOR MODEL	FURNACE MODEL	AHRI STANDARD RATINGS						
			COOLING						
			CAPACITY BTU/hr	Factory Installed	SEER			EER	
STANDARD	TDR	TXV							
R4A342AKA R4A342GKA	*ED*4X42J**		40000	TXV		13		11	
	FEM4P42**A*		41000	TDR			13	11	
	FEM4P48**A*		41000	TDR			13	11	
	FEM4X42****		39500	TDR&TXV	13.5			11.5	
	FEM4X48****		40000	TDR&TXV	13.5			11.5	
	FS(M,U)4P42**A*		41000	TDR			13	11	
	FS(M,U)4P48**A*		41000	TDR			13	11	
	FS(M,U)4X42****		39500	TDR&TXV	13			11	
	FS(M,U)4X48****		39500	TDR&TXV	13			11	
	FVM4X36****		40000	TDR&TXV	14			11.5	
	FVM4X36****		40000	TDR&TXV	14			11.5	
	FVM4X48****		39500	TDR&TXV	14			12	
	FVM4X60****		40000	TDR&TXV	14			12	
	FXM4X42**A*		41500	TDR&TXV	13.85			11.5	
	FXM4X48**A*		42000	TDR&TXV	14.35			12	
	FXM4X60**A*		42500	TDR&TXV	14.5			12	
	EA*4X42*21A*	*8MV*0901716**		40000	TDR&TXV	13.5			11.3
	EA*4X42*21A*	*8MV*1102120**		40000	TDR&TXV	13.7			11.5
	EA*4X42*21A*	*8MX*0902116**		40000	TDR&TXV	13.7			11.5
	EA*4X42*21A*	*8MX*1102120**		40500	TDR&TXV	13.7			11.5
	EA*4X42*21A*	*9MA*0601714A**		39500	TDR&TXV	13.3			11
	EA*4X42*21A*	*9MA*0801714A**		39500	TDR&TXV	13.5			11.2
	EA*4X42*21A*	*9MA*0802120A**		39500	TDR&TXV	13.7			11.3
	EA*4X42*21A*	*9MA*1002122A**		40000	TDR&TXV	13.7			11.5
	EA*4X42*21A*	*9MAC0602120A**		39500	TDR&TXV	13.5			11.2
	EA*4X42*21A*	*9MV*0802120A**		40000	TDR&TXV	13.5			11.3
	EA*4X42*21A*	*9MV*1002120A**		40000	TDR&TXV	13.7			11.5
	EA*4X42*21A*	*9MX*0601714A**		40000	TDR&TXV	13			11
	EA*4X42*21A*	*9MX*0801716A**		40000	TDR&TXV	13.3			11
	EA*4X42*21A*	*9MX*0802120A**		40500	TDR&TXV	13.5			11.3
	EA*4X42*21A*	*9MX*1002120A**		40000	TDR&TXV	13.7			11.5
	EA*4X42*21A*	*9MA*1002120A**		39500	TDR&TXV	13.7			11.4
	EA*4X42*21A*	*9MX*1002116A**		40000	TDR&TXV	13.5			11.2
	EA*4X42*24A*	*8MV*1102120**		40000	TDR&TXV	13.7			11.5
	EA*4X42*24A*	*8MV*1352422**		40000	TDR&TXV	13.7			11.5
	EA*4X42*24A*	*8MX*0902116**		40000	TDR&TXV	13.7			11.5
	EA*4X42*24A*	*8MX*1102120**		40500	TDR&TXV	13.7			11.5
	EA*4X42*24A*	*8MX*1352420**		40500	TDR&TXV	13.7			11.5
	EA*4X42*24A*	*9MA*0802120A**		40000	TDR&TXV	13.7			11.5
	EA*4X42*24A*	*9MA*1002122A**		40000	TDR&TXV	13.7			11.5
EA*4X42*24A*	*9MA*1202422A**		40000	TDR&TXV	13.7			11.4	
EA*4X42*24A*	*9MAC0602120A**		39500	TDR&TXV	13.2			11.3	
EA*4X42*24A*	*9MV*0802120A**		40000	TDR&TXV	13.5			11.3	
EA*4X42*24A*	*9MV*1002120A**		40000	TDR&TXV	13.7			11.5	
EA*4X42*24A*	*9MX*0802120A**		40500	TDR&TXV	13.5			11.3	
EA*4X42*24A*	*9MX*1002120A**		40000	TDR&TXV	13.7			11.5	
EA*4X42*24A*	*9MX*1202422A**		40500	TDR&TXV	13.7			11.4	
EA*4X42*24A*	*9MA*1002120A**		39500	TDR&TXV	13.7			11.4	
EA*4X42*24A*	*9MX*1002116A**		40000	TDR&TXV	13.5			11.2	

COOLING PERFORMANCE FOR COMBINATION RATINGS Indoor Models

For complete ratings information, use the AHRI website directory search: www.AHRIdirectory.org.
New ratings may be listed online before Specification Sheets are updated.

MODEL	INDOOR MODEL	FURNACE MODEL	AHRI STANDARD RATINGS					
			COOLING					
			CAPACITY BTU/hr	Factory Installed	SEER			EER
STANDARD	TDR	TXV						
R4A342AKA R4A342GKA	EA*4X48*17A*	*8MV*0701412**	41000	TDR&TXV	13.2			11.3
	EA*4X48*17A*	*8MV*0901716**	41000	TDR&TXV	13.7			11.5
	EA*4X48*17A*	*8MX*0701716**	41000	TDR&TXV	13			11.2
	EA*4X48*17A*	*9MA*0601714A**	40500	TDR&TXV	13.5			11.2
	EA*4X48*17A*	*9MA*0801714A**	40500	TDR&TXV	13.7			11.4
	EA*4X48*17A*	*9MX*0601714A**	41000	TDR&TXV	13.5			11.2
	EA*4X48*17A*	*9MX*0801716A**	41000	TDR&TXV	13.5			11.2
	EA*4X48*21A*	*8MV*0901716**	40500	TDR&TXV	13.7			11.5
	EA*4X48*21A*	*8MV*1102120**	40500	TDR&TXV	13.7			11.5
	EA*4X48*21A*	*8MX*0701716**	40500	TDR&TXV	13			11
	EA*4X48*21A*	*8MX*0902116**	41000	TDR&TXV	13.7			11.5
	EA*4X48*21A*	*8MX*1102120**	41000	TDR&TXV	13.7			11.7
	EA*4X48*21A*	*9MA*0601714A**	40000	TDR&TXV	13.3			11
	EA*4X48*21A*	*9MA*0801714A**	40000	TDR&TXV	13.5			11.2
	EA*4X48*21A*	*9MA*0802120A**	40500	TDR&TXV	13.7			11.5
	EA*4X48*21A*	*9MA*1002122A**	41000	TDR&TXV	13.7			11.5
	EA*4X48*21A*	*9MAC0602120A**	40000	TDR&TXV	13.5			11.3
	EA*4X48*21A*	*9MV*0802120A**	40500	TDR&TXV	13.7			11.5
	EA*4X48*21A*	*9MV*1002120A**	40500	TDR&TXV	13.7			11.5
	EA*4X48*21A*	*9MX*0601714A**	40500	TDR&TXV	13.3			11
	EA*4X48*21A*	*9MX*0801716A**	40500	TDR&TXV	13.3			11
	EA*4X48*21A*	*9MX*0802120A**	41000	TDR&TXV	13.7			11.5
	EA*4X48*21A*	*9MX*1002120A**	40500	TDR&TXV	13.7			11.5
	EA*4X48*21A*	*9MA*1002120A**	40500	TDR&TXV	13.7			11.4
	EA*4X48*21A*	*9MX*1002116A**	40500	TDR&TXV	13.7			11.4
	EA*4X48*24A*	*8MV*1102120**	41000	TDR&TXV	13.7			11.5
	EA*4X48*24A*	*8MV*1352422**	41000	TDR&TXV	14			11.7
	EA*4X48*24A*	*8MX*0902116**	41000	TDR&TXV	13.7			11.5
	EA*4X48*24A*	*8MX*1102120**	41000	TDR&TXV	14			11.7
	EA*4X48*24A*	*8MX*1352420**	41000	TDR&TXV	13.7			11.7
	EA*4X48*24A*	*9MA*0802120A**	40500	TDR&TXV	13.7			11.5
	EA*4X48*24A*	*9MA*1002122A**	41000	TDR&TXV	13.7			11.7
	EA*4X48*24A*	*9MA*1202422A**	40500	TDR&TXV	14			11.5
	EA*4X48*24A*	*9MAC0602120A**	40500	TDR&TXV	13.5			11.3
	EA*4X48*24A*	*9MV*0802120A**	41000	TDR&TXV	13.7			11.5
	EA*4X48*24A*	*9MV*1002120A**	41000	TDR&TXV	13.7			11.7
	EA*4X48*24A*	*9MX*0802120A**	41000	TDR&TXV	13.7			11.5
	EA*4X48*24A*	*9MX*1002120A**	41000	TDR&TXV	13.7			11.5
	EA*4X48*24A*	*9MX*1202422A**	41000	TDR&TXV	14			11.5
	EA*4X48*24A*	*9MA*1002120A**	40500	TDR&TXV	13.7			11.4
	EA*4X48*24A*	*9MX*1002116A**	40500	TDR&TXV	13.7			11.4
	EHD4X42A**	*8MV*0701412**	41000	TDR&TXV	13			11
	EHD4X42A**	*8MV*0901716**	41000	TDR&TXV	14			11.5
	EHD4X42A**	*8MV*1102120**	41000	TDR&TXV	14			11.5
	EHD4X42A**	*8MV*1352422**	41000	TDR&TXV	14.25			12
	EHD4X42A**	*8MX*0701716**	41000	TDR&TXV	13			11
EHD4X42A**	*8MX*0902116**	41000	TDR&TXV	14			11.5	
EHD4X42A**	*8MX*1102120**	41000	TDR&TXV	14.25			12	
EHD4X42A**	*8MX*1352420**	41000	TDR&TXV	14			11.5	
EHD4X42A**	*9MA*0601714A**	40500	TDR&TXV	13.5			11.2	
EHD4X42A**	*9MA*0801714A**	40500	TDR&TXV	13.7			11.4	

COOLING PERFORMANCE FOR COMBINATION RATINGS Indoor Models

For complete ratings information, use the AHRI website directory search: www.AHRIdirectory.org.
 New ratings may be listed online before Specification Sheets are updated.

MODEL	INDOOR MODEL	FURNACE MODEL	AHRI STANDARD RATINGS					
			COOLING					
			CAPACITY BTU/hr	Factory Installed	SEER			EER
STANDARD	TDR	TXV						
R4A342AKA R4A342GKA	EHD4X42A**	*9MA*0802120A**	40500	TDR&TXV	13.7			11.5
	EHD4X42A**	*9MA*1002122A**	41000	TDR&TXV	13.7			11.7
	EHD4X42A**	*9MA*1202422A**	40500	TDR&TXV	14			11.5
	EHD4X42A**	*9MAC0602120A**	40500	TDR&TXV	13.5			11.3
	EHD4X42A**	*9MV*0802120A**	41000	TDR&TXV	13.7			11.5
	EHD4X42A**	*9MV*1002120A**	41000	TDR&TXV	13.7			11.7
	EHD4X42A**	*9MX*0601714A**	41000	TDR&TXV	13.5			11.2
	EHD4X42A**	*9MX*0801716A**	41000	TDR&TXV	13.5			11.2
	EHD4X42A**	*9MX*0802120A**	41000	TDR&TXV	13.7			11.5
	EHD4X42A**	*9MX*1002120A**	41000	TDR&TXV	13.7			11.5
	EHD4X42A**	*9MX*1202422A**	41500	TDR&TXV	14			11.5
	EHD4X42A**	MV12F19**B*	39000	TDR&TXV	14			12
	EHD4X42A**	MV16J22**B*	39000	TDR&TXV	14			12
	EHD4X42A**	MV20L24**B*	39000	TDR&TXV	14			12
	EHD4X42A**	NOMV156E19*	41000	TDR&TXV	14			11.5
	EHD4X42A**	*9MA*1002120A**	40500	TDR&TXV	13.7			11.4
	EHD4X42A**	*9MX*1002116A**	40500	TDR&TXV	13.7			11.4
	EHD4X42A**		39000	TXV			13	11
	EHD4X48A**	*8MV*0701412**	41000	TDR&TXV	13			11
	EHD4X48A**	*8MV*0901716**	41000	TDR&TXV	14			11.5
	EHD4X48A**	*8MV*1102120**	41000	TDR&TXV	14			11.5
	EHD4X48A**	*8MV*1352422**	41000	TDR&TXV	14.3			12
	EHD4X48A**	*8MX*0701716**	41000	TDR&TXV	13			11
	EHD4X48A**	*8MX*0902116**	41000	TDR&TXV	14.15			11.9
	EHD4X48A**	*8MX*1102120**	41000	TDR&TXV	14.3			12
	EHD4X48A**	*8MX*1352420**	41000	TDR&TXV	14.15			11.9
	EHD4X48A**	*9MA*0601714A**	40500	TDR&TXV	13.5			11.2
	EHD4X48A**	*9MA*0801714A**	40500	TDR&TXV	13.7			11.4
	EHD4X48A**	*9MA*0802120A**	41000	TDR&TXV	13.7			11.5
	EHD4X48A**	*9MA*1002122A**	41000	TDR&TXV	14			11.7
	EHD4X48A**	*9MA*1202422A**	41000	TDR&TXV	14			11.5
	EHD4X48A**	*9MAC0602120A**	40500	TDR&TXV	13.5			11.3
	EHD4X48A**	*9MV*0802120A**	41000	TDR&TXV	13.7			11.5
	EHD4X48A**	*9MV*1002120A**	41000	TDR&TXV	14			11.7
	EHD4X48A**	*9MX*0601714A**	41000	TDR&TXV	13.5			11.2
	EHD4X48A**	*9MX*0801716A**	41000	TDR&TXV	13.5			11.2
	EHD4X48A**	*9MX*0802120A**	41500	TDR&TXV	13.7			11.5
	EHD4X48A**	*9MX*1002120A**	41000	TDR&TXV	14			11.7
	EHD4X48A**	*9MX*1202422A**	41500	TDR&TXV	14			11.5
	EHD4X48A**	MV12F19**B*	39000	TDR&TXV	14			12
	EHD4X48A**	MV16J22**B*	39000	TDR&TXV	14			12
	EHD4X48A**	MV20L24**B*	39000	TDR&TXV	14			12
	EHD4X48A**	NOMV156E19*	41000	TDR&TXV	14			11.5
	EHD4X48A**	*9MA*1002120A**	41000	TDR&TXV	13.7			11.4
	EHD4X48A**	*9MX*1002116A**	41000	TDR&TXV	13.7			11.4
EHD4X48A**		39500	TXV			13	11	
EMA4X48D**		39500	TXV			13	11	
EN(A,D)4X43*24**	*8MV*1102120**	41000	TDR&TXV	14.35			12	
EN(A,D)4X43*24**	*8MV*1352422**	41000	TDR&TXV	14.5			12	
EN(A,D)4X43*24**	*8MX*0902116**	41000	TDR&TXV	14.3			12	
EN(A,D)4X43*24**	*8MX*1102120**	41000	TDR&TXV	14.45			12	

COOLING PERFORMANCE FOR COMBINATION RATINGS Indoor Models

For complete ratings information, use the AHRI website directory search: www.AHRIdirectory.org.
New ratings may be listed online before Specification Sheets are updated.

MODEL	INDOOR MODEL	FURNACE MODEL	AHRI STANDARD RATINGS					
			COOLING					
			CAPACITY BTU/hr	Factory Installed	SEER			EER
STANDARD	TDR	TXV						
R4A342AKA R4A342GKA	EN(A,D)4X43*24**	*8MX*1352420**	41000	TDR&TXV	14.35			12
	EN(A,D)4X43*24**	*9MA*0802120A**	41000	TDR&TXV	14			11.7
	EN(A,D)4X43*24**	*9MA*1002122A**	41500	TDR&TXV	14			11.7
	EN(A,D)4X43*24**	*9MA*1202422A**	41000	TDR&TXV	14.2			11.8
	EN(A,D)4X43*24**	*9MAC0602120A**	41000	TDR&TXV	13.7			11.5
	EN(A,D)4X43*24**	*9MV*0802120A**	41500	TDR&TXV	14			11.7
	EN(A,D)4X43*24**	*9MV*1002120A**	41500	TDR&TXV	14			11.7
	EN(A,D)4X43*24**	*9MX*0802120A**	42000	TDR&TXV	13.7			11.7
	EN(A,D)4X43*24**	*9MX*1002120A**	41500	TDR&TXV	14			11.7
	EN(A,D)4X43*24**	*9MX*1202422A**	42000	TDR&TXV	14.2			11.8
	EN(A,D)4X43*24**	MV16J22**B*	41000	TDR&TXV	14.5			12
	EN(A,D)4X43*24**	MV20L24**B*	41000	TDR&TXV	14.5			12
	EN(A,D)4X43*24**	NOMV156E19*	41000	TDR&TXV	14.25			12
	EN(A,D)4X43*24**	*9MA*1002120A**	41000	TDR&TXV	14			11.5
	EN(A,D)4X43*24**	*9MX*1002116A**	41500	TDR&TXV	13.7			11.4
	EN(A,D)4X43*24**		41000	TXV		13		11
	EN(A,D)4X48*24**	*8MV*1102120**	41000	TDR&TXV	14			11.5
	EN(A,D)4X48*24**	*8MV*1352422**	41000	TDR&TXV	14.35			12
	EN(A,D)4X48*24**	*8MX*0902116**	41000	TDR&TXV	14			11.5
	EN(A,D)4X48*24**	*8MX*1102120**	41000	TDR&TXV	14.25			12
	EN(A,D)4X48*24**	*8MX*1352420**	41000	TDR&TXV	14.15			11.9
	EN(A,D)4X48*24**	*9MA*0802120A**	40500	TDR&TXV	13.7			11.5
	EN(A,D)4X48*24**	*9MA*1002122A**	41000	TDR&TXV	14			11.7
	EN(A,D)4X48*24**	*9MA*1202422A**	40500	TDR&TXV	14			11.5
	EN(A,D)4X48*24**	*9MAC0602120A**	40500	TDR&TXV	13.5			11.3
	EN(A,D)4X48*24**	*9MV*0802120A**	41000	TDR&TXV	13.7			11.5
	EN(A,D)4X48*24**	*9MV*1002120A**	41000	TDR&TXV	13.7			11.7
	EN(A,D)4X48*24**	*9MX*0802120A**	41000	TDR&TXV	13.7			11.5
	EN(A,D)4X48*24**	*9MX*1002120A**	41000	TDR&TXV	13.7			11.7
	EN(A,D)4X48*24**	*9MX*1202422A**	41500	TDR&TXV	14			11.5
	EN(A,D)4X48*24**	MV16J22**B*	41000	TDR&TXV	14.5			12
	EN(A,D)4X48*24**	MV20L24**B*	41000	TDR&TXV	14.5			12
	EN(A,D)4X48*24**	NOMV156E19*	41000	TDR&TXV	14			11.5
	EN(A,D)4X48*24**	*9MX*1002116A**	40500	TDR&TXV	13.7			11.4
	EN(A,D)4X48*24**		41000	TXV		13		11
	EN(A,D,W)4X42*21**	*8MV*0901716**	40500	TDR&TXV	13			11
	EN(A,D,W)4X42*21**	*8MV*1102120**	40500	TDR&TXV	13			11
	EN(A,D,W)4X42*21**	*8MX*0701716**	40000	TDR&TXV	13			11
	EN(A,D,W)4X42*21**	*8MX*0902116**	40500	TDR&TXV	13.85			11.5
	EN(A,D,W)4X42*21**	*8MX*1102120**	40500	TDR&TXV	13.95			11.5
	EN(A,D,W)4X42*21**	*9MA*0601714A**	39500	TDR&TXV	13			11
	EN(A,D,W)4X42*21**	*9MA*0801714A**	39500	TDR&TXV	13.3			11
	EN(A,D,W)4X42*21**	*9MA*0802120A**	40000	TDR&TXV	13.5			11.3
	EN(A,D,W)4X42*21**	*9MA*1002122A**	40000	TDR&TXV	13.5			11.3
EN(A,D,W)4X42*21**	*9MAC0602120A**	39500	TDR&TXV	13.2			11.2	
EN(A,D,W)4X42*21**	*9MV*0802120A**	40000	TDR&TXV	13.5			11.3	
EN(A,D,W)4X42*21**	*9MV*1002120A**	40000	TDR&TXV	13.5			11.3	
EN(A,D,W)4X42*21**	*9MX*0601714A**	40000	TDR&TXV	13			11	
EN(A,D,W)4X42*21**	*9MX*0801716A**	40000	TDR&TXV	13			11	
EN(A,D,W)4X42*21**	*9MX*0802120A**	40000	TDR&TXV	13.5			11.3	
EN(A,D,W)4X42*21**	*9MX*1002120A**	40000	TDR&TXV	13.5			11.3	

COOLING PERFORMANCE FOR COMBINATION RATINGS Indoor Models

For complete ratings information, use the AHRI website directory search: www.AHRIdirectory.org.

New ratings may be listed online before Specification Sheets are updated.

MODEL	INDOOR MODEL	FURNACE MODEL	AHRI STANDARD RATINGS					
			COOLING					
			CAPACITY BTU/hr	Factory Installed	SEER			EER
STANDARD	TDR	TXV						
R4A342AKA R4A342GKA	EN(A,D,W)4X42*21**	MV12F19**B*	41000	TDR&TXV	14			11.5
	EN(A,D,W)4X42*21**	NOMV156E19*	40000	TDR&TXV	13			11
	EN(A,D,W)4X42*21**	*8MPV075	40500	TDR&TXV	13			11
	EN(A,D,W)4X42*21**	*9MA*1002120A**	40000	TDR&TXV	13.5			11.2
	EN(A,D,W)4X42*21**	*9MX*1002116A**	40000	TDR&TXV	13.5			11.2
	EN(A,D,W)4X42*21**		41000	TXV		12.9		10.9
	EN(A,D,W)4X48*21**	*8MV*0901716**	41000	TDR&TXV	14			11.5
	EN(A,D,W)4X48*21**	*8MV*1102120**	41000	TDR&TXV	14			11.5
	EN(A,D,W)4X48*21**	*8MX*0701716**	41000	TDR&TXV	13			11
	EN(A,D,W)4X48*21**	*8MX*0902116**	41000	TDR&TXV	14			11.5
	EN(A,D,W)4X48*21**	*8MX*1102120**	41000	TDR&TXV	14.25			12
	EN(A,D,W)4X48*21**	*9MA*0601714A**	40000	TDR&TXV	13.5			11.2
	EN(A,D,W)4X48*21**	*9MA*0801714A**	40500	TDR&TXV	13.7			11.4
	EN(A,D,W)4X48*21**	*9MA*0802120A**	40500	TDR&TXV	13.7			11.5
	EN(A,D,W)4X48*21**	*9MA*1002122A**	41000	TDR&TXV	14			11.7
	EN(A,D,W)4X48*21**	*9MAC0602120A**	40500	TDR&TXV	13.5			11.3
	EN(A,D,W)4X48*21**	*9MV*0802120A**	41000	TDR&TXV	13.7			11.5
	EN(A,D,W)4X48*21**	*9MV*1002120A**	41000	TDR&TXV	13.7			11.7
	EN(A,D,W)4X48*21**	*9MX*0601714A**	40500	TDR&TXV	13.5			11.2
	EN(A,D,W)4X48*21**	*9MX*0801716A**	41000	TDR&TXV	13.5			11.2
	EN(A,D,W)4X48*21**	*9MX*0802120A**	41000	TDR&TXV	13.7			11.5
	EN(A,D,W)4X48*21**	*9MX*1002120A**	41000	TDR&TXV	13.7			11.7
	EN(A,D,W)4X48*21**	MV12F19**B*	41000	TDR&TXV	14.45			12
	EN(A,D,W)4X48*21**	NOMV156E19*	41000	TDR&TXV	14			11.5
	EN(A,D,W)4X48*21**	*9MA*1002120A**	40500	TDR&TXV	13.7			11.4
	EN(A,D,W)4X48*21**	*9MX*1002116A**	40500	TDR&TXV	13.7			11.4
	EN(A,D,W)4X48*21**		41000	TXV		13		11
	END4X42*17**	*8MV*0701412**	40500	TDR&TXV	13			11
	END4X42*17**	*8MV*0901716**	41000	TDR&TXV	13.85			11.5
	END4X42*17**	*8MX*0701716**	41000	TDR&TXV	13			11
	END4X42*17**	*9MA*0601714A**	40000	TDR&TXV	13.3			11
	END4X42*17**	*9MA*0801714A**	40000	TDR&TXV	13.5			11.2
	END4X42*17**	*9MX*0601714A**	40000	TDR&TXV	13.3			11
	END4X42*17**	*9MX*0801716A**	40500	TDR&TXV	13.3			11
	END4X42*17**		41000	TXV		13		11
	ENH4X42*21**	*8MV*0701412**	40000	TDR&TXV	13			11
	ENH4X42*21**	*8MV*0901716**	40500	TDR&TXV	13			11
	ENH4X42*21**	*8MV*1102120**	40500	TDR&TXV	13			11
	ENH4X42*21**	*8MV*1352422**	40500	TDR&TXV	13.95			11.5
	ENH4X42*21**	*8MX*0701716**	40000	TDR&TXV	13			11
ENH4X42*21**	*8MX*0902116**	40500	TDR&TXV	13.85			11.5	
ENH4X42*21**	*8MX*1102120**	40500	TDR&TXV	13.95			11.5	
ENH4X42*21**	*8MX*1352420**	40500	TDR&TXV	13.85			11.5	
ENH4X42*21**	*9MA*0601714A**	39500	TDR&TXV	13			11	
ENH4X42*21**	*9MA*0801714A**	39500	TDR&TXV	13.3			11	
ENH4X42*21**	*9MA*0802120A**	40000	TDR&TXV	13.5			11.3	
ENH4X42*21**	*9MA*1002122A**	40000	TDR&TXV	13.5			11.3	
ENH4X42*21**	*9MA*1202422A**	40000	TDR&TXV	13.7			11.4	
ENH4X42*21**	*9MAC0602120A**	39500	TDR&TXV	13.2			11.2	

COOLING PERFORMANCE FOR COMBINATION RATINGS Indoor Models

For complete ratings information, use the AHRI website directory search: www.AHRIdirectory.org.
New ratings may be listed online before Specification Sheets are updated.

MODEL	INDOOR MODEL	FURNACE MODEL	AHRI STANDARD RATINGS					
			COOLING					
			CAPACITY BTU/hr	Factory Installed	SEER			EER
STANDARD	TDR	TXV						
R4A342AKA R4A342GKA	ENH4X42*21**	*9MV*0802120A**	40000	TDR&TXV	13.5			11.3
	ENH4X42*21**	*9MV*1002120A**	40000	TDR&TXV	13.5			11.3
	ENH4X42*21**	*9MX*0601714A**	40000	TDR&TXV	13			11
	ENH4X42*21**	*9MX*0801716A**	40000	TDR&TXV	13			11
	ENH4X42*21**	*9MX*0802120A**	40000	TDR&TXV	13.5			11.3
	ENH4X42*21**	*9MX*1002120A**	40000	TDR&TXV	13.5			11.3
	ENH4X42*21**	*9MX*1202422A**	40500	TDR&TXV	13.7			11.4
	ENH4X42*21**	MV12F19**B*	41000	TDR&TXV	14			11.5
	ENH4X42*21**	MV16J22**B*	41000	TDR&TXV	14.2			12
	ENH4X42*21**	MV20L24**B*	41000	TDR&TXV	14.2			12
	ENH4X42*21**	NOMV156E19*	40000	TDR&TXV	13			11
	ENH4X42*21**	*9MA*1002120A**	40000	TDR&TXV	13.5			11.2
	ENH4X42*21**	*9MX*1002116A**	40000	TDR&TXV	13.5			11.2
	ENH4X42*21**		41000	TXV			12.9	10.9
	ENH4X43*21**	*8MV*0701412**	41000	TDR&TXV	13.85			11.5
	ENH4X43*21**	*8MV*0901716**	41000	TDR&TXV	14.25			12
	ENH4X43*21**	*8MV*1102120**	41000	TDR&TXV	14.25			12
	ENH4X43*21**	*8MV*1352422**	41000	TDR&TXV	14.45			12
	ENH4X43*21**	*8MX*0701716**	41000	TDR&TXV	13			11
	ENH4X43*21**	*8MX*0902116**	41000	TDR&TXV	14.25			12
	ENH4X43*21**	*8MX*1102120**	41000	TDR&TXV	14.4			12
	ENH4X43*21**	*8MX*1352420**	41000	TDR&TXV	14.3			12
	ENH4X43*21**	*9MA*0601714A**	41000	TDR&TXV	13.5			11.2
	ENH4X43*21**	*9MA*0801714A**	41000	TDR&TXV	13.7			11.4
	ENH4X43*21**	*9MA*0802120A**	41000	TDR&TXV	14			11.7
	ENH4X43*21**	*9MA*1002122A**	41500	TDR&TXV	14			11.7
	ENH4X43*21**	*9MA*1202422A**	41000	TDR&TXV	14.2			11.8
	ENH4X43*21**	*9MAC0602120A**	41000	TDR&TXV	13.7			11.5
	ENH4X43*21**	*9MV*0802120A**	41500	TDR&TXV	14			11.7
	ENH4X43*21**	*9MV*1002120A**	41500	TDR&TXV	14			11.7
	ENH4X43*21**	*9MX*0601714A**	41000	TDR&TXV	13.5			11.2
	ENH4X43*21**	*9MX*0801716A**	41500	TDR&TXV	13.5			11.2
	ENH4X43*21**	*9MX*0802120A**	41500	TDR&TXV	13.7			11.7
	ENH4X43*21**	*9MX*1002120A**	41500	TDR&TXV	14			11.7
	ENH4X43*21**	*9MX*1202422A**	42000	TDR&TXV	14			11.5
	ENH4X43*21**	MV12F19**B*	41000	TDR&TXV	14.5			12
	ENH4X43*21**	MV16J22**B*	41000	TDR&TXV	14.5			12
	ENH4X43*21**	MV20L24**B*	41000	TDR&TXV	14.5			12
	ENH4X43*21**	NOMV156E19*	41000	TDR&TXV	14.2			12
	ENH4X43*21**	*9MA*1002120A**	41000	TDR&TXV	14			11.5
ENH4X43*21**	*9MX*1002116A**	41000	TDR&TXV	13.7			11.4	
ENH4X43*21**		41000	TXV			13	11	
ENH4X48*21**	*8MV*0701412**	41000	TDR&TXV	13			11	
ENH4X48*21**	*8MV*0901716**	41000	TDR&TXV	14			11.5	
ENH4X48*21**	*8MV*1102120**	41000	TDR&TXV	14			11.5	
ENH4X48*21**	*8MV*1352422**	41000	TDR&TXV	14.35			12	
ENH4X48*21**	*8MX*0701716**	41000	TDR&TXV	13			11	
ENH4X48*21**	*8MX*0902116**	41000	TDR&TXV	14			11.5	
ENH4X48*21**	*8MX*1102120**	41000	TDR&TXV	14.25			12	

COOLING PERFORMANCE FOR COMBINATION RATINGS Indoor Models

For complete ratings information, use the AHRI website directory search: www.AHRIdirectory.org.
 New ratings may be listed online before Specification Sheets are updated.

MODEL	INDOOR MODEL	FURNACE MODEL	AHRI STANDARD RATINGS					
			COOLING					
			CAPACITY BTU/hr	Factory Installed	SEER			EER
STANDARD	TDR	TXV						
R4A342AKA	ENH4X48*21**	*8MX*1352420**	41000	TDR&TXV	14.15			11.9
R4A342GKA	ENH4X48*21**	*9MA*0601714A**	40000	TDR&TXV	13.5			11.2
	ENH4X48*21**	*9MA*0801714A**	40500	TDR&TXV	13.7			11.4
	ENH4X48*21**	*9MA*0802120A**	40500	TDR&TXV	13.7			11.5
	ENH4X48*21**	*9MA*1002122A**	41000	TDR&TXV	14			11.7
	ENH4X48*21**	*9MA*1202422A**	40500	TDR&TXV	14			11.5
	ENH4X48*21**	*9MAC0602120A**	40500	TDR&TXV	13.5			11.3
	ENH4X48*21**	*9MV*0802120A**	41000	TDR&TXV	13.7			11.5
	ENH4X48*21**	*9MV*1002120A**	41000	TDR&TXV	13.7			11.7
	ENH4X48*21**	*9MX*0601714A**	40500	TDR&TXV	13.5			11.2
	ENH4X48*21**	*9MX*0801716A**	41000	TDR&TXV	13.5			11.2
	ENH4X48*21**	*9MX*0802120A**	41000	TDR&TXV	13.7			11.5
	ENH4X48*21**	*9MX*1002120A**	41000	TDR&TXV	13.7			11.7
	ENH4X48*21**	*9MX*1202422A**	41500	TDR&TXV	14			11.5
	ENH4X48*21**	MV12F19**B*	41000	TDR&TXV	14.45			12
	ENH4X48*21**	MV16J22**B*	41000	TDR&TXV	14.5			12
	ENH4X48*21**	MV20L24**B*	41000	TDR&TXV	14.5			12
	ENH4X48*21**	NOMV156E19*	41000	TDR&TXV	14			11.5
	ENH4X48*21**	*9MA*1002120A**	40500	TDR&TXV	13.7			11.4
	ENH4X48*21**	*9MX*1002116A**	40500	TDR&TXV	13.7			11.4
	ENH4X48*21**		41000	TXV			13	11
	* Tested Combo							

COOLING PERFORMANCE FOR COMBINATION RATINGS Indoor Models

For complete ratings information, use the AHRI website directory search: www.AHRIdirectory.org.
New ratings may be listed online before Specification Sheets are updated.

MODEL	INDOOR MODEL	FURNACE MODEL	AHRI STANDARD RATINGS						
			COOLING						
			CAPACITY BTU/hr	Factory Installed	SEER			EER	
STANDARD	TDR	TXV							
R4A348AKA R4A348GKA	*ED*4X48J**		46000	TXV		13		11	
	FEM4P48**A*		44500	TDR			13	11	
	FEM4X48****		46000	TDR&TXV	13.5			11.5	
	FEM4X60****		46000	TDR&TXV	13.5			11.5	
	FS(M,U)4P48**A*		45500	TDR			13	11	
	FS(M,U)4X60****		46000	TDR&TXV	13			11	
	FVM4X48****		46000	TDR&TXV	13.5			11.5	
	FVM4X60****		46000	TDR&TXV	14			12	
	FXM4X48**A*		46500	TDR&TXV	14			11.5	
	FXM4X60**A*		47000	TDR&TXV	14.4			12	
	EA*4X48*17A*	*8MV*0901716**		45000	TDR&TXV	13.2			11.2
	EA*4X48*17A*			45000	TXV		13		11
	EA*4X48*21A*	*8MV*0901716**		45000	TDR&TXV	13.2			11.2
	EA*4X48*21A*	*8MV*1102120**		45000	TDR&TXV	13.2			11.2
	EA*4X48*21A*	*8MX*0902116**		45000	TDR&TXV	13.2			11.2
	EA*4X48*21A*	*8MX*1102120**		45000	TDR&TXV	13.7			11.3
	EA*4X48*21A*	*9MA*0802120A**		44500	TDR&TXV	13.5			11.3
	EA*4X48*21A*	*9MA*1002122A**		45000	TDR&TXV	13.5			11.3
	EA*4X48*21A*	*9MAC0602120A**		44500	TDR&TXV	13			11
	EA*4X48*21A*	*9MV*0801716A**		44500	TDR&TXV	13.3			11
	EA*4X48*21A*	*9MV*0802120A**		45000	TDR&TXV	13.2			11.2
	EA*4X48*21A*	*9MV*1002120A**		45000	TDR&TXV	13.5			11.3
	EA*4X48*21A*	*9MX*0802120A**		45000	TDR&TXV	13.2			11.2
	EA*4X48*21A*	*9MX*1002120A**		45000	TDR&TXV	13.5			11.2
	EA*4X48*21A*	*9MA*1002120A**		44500	TDR&TXV	13.3			11
	EA*4X48*21A*	*9MV*1002116A**		45000	TDR&TXV	13			11
	EA*4X48*21A*	*9MX*1002116A**		44500	TDR&TXV	13.3			11
	EA*4X48*24A*	*8MV*1102120**		45000	TDR&TXV	13.5			11.3
	EA*4X48*24A*	*8MV*1352422**		45000	TDR&TXV	13.7			11.3
	EA*4X48*24A*	*8MX*0902116**		45000	TDR&TXV	13.2			11.2
	EA*4X48*24A*	*8MX*1102120**		45000	TDR&TXV	13.7			11.5
	EA*4X48*24A*	*8MX*1352420**		45000	TDR&TXV	13.5			11.3
	EA*4X48*24A*	*9MA*0802120A**		44500	TDR&TXV	13.5			11.3
	EA*4X48*24A*	*9MA*1002122A**		45000	TDR&TXV	13.5			11.3
	EA*4X48*24A*	*9MA*1202422A**		44500	TDR&TXV	13.7			11.4
	EA*4X48*24A*	*9MAC0602120A**		44500	TDR&TXV	13.2			11.2
	EA*4X48*24A*	*9MV*0802120A**		45000	TDR&TXV	13.5			11.3
	EA*4X48*24A*	*9MV*1002120A**		45000	TDR&TXV	13.5			11.3
	EA*4X48*24A*	*9MV*1202422A**		45000	TDR&TXV	13.7			11.4
	EA*4X48*24A*	*9MX*0802120A**		45000	TDR&TXV	13.2			11.2
	EA*4X48*24A*	*9MX*1002120A**		45000	TDR&TXV	13.5			11.3
	EA*4X48*24A*	*9MX*1202422A**		45000	TDR&TXV	13.5			11.2
EA*4X48*24A*	*9MA*1002120A**		44500	TDR&TXV	13.5			11.2	
EA*4X48*24A*	*9MV*1002116A**		45000	TDR&TXV	13			11	
EA*4X48*24A*	*9MX*1002116A**		45000	TDR&TXV	13.3			11	
EA*4X60*21A*	*8MV*0901716**		46000	TDR&TXV	13.5			11.3	
EA*4X60*21A*	*8MV*1102120**		46000	TDR&TXV	13.7			11.5	
EA*4X60*21A*	*8MX*0902116**		46000	TDR&TXV	13.7			11.3	
EA*4X60*21A*	*8MX*1102120**		46000	TDR&TXV	13.7			11.7	

COOLING PERFORMANCE FOR COMBINATION RATINGS Indoor Models

For complete ratings information, use the AHRI website directory search: www.AHRIdirectory.org.
New ratings may be listed online before Specification Sheets are updated.

MODEL	INDOOR MODEL	FURNACE MODEL	AHRI STANDARD RATINGS					
			COOLING					
			CAPACITY BTU/hr	Factory Installed	SEER			EER
STANDARD	TDR	TXV						
R4A348AKA	EA*4X60*21A*	*9MA*0802120A**	45500	TDR&TXV	13.7			11.5
R4A348GKA	EA*4X60*21A*	*9MA*1002122A**	46000	TDR&TXV	13.7			11.5
	EA*4X60*21A*	*9MAC0602120A**	45000	TDR&TXV	13.2			11.2
	EA*4X60*21A*	*9MV*0801716A**	45500	TDR&TXV	13.5			11.2
	EA*4X60*21A*	*9MV*0802120A**	46000	TDR&TXV	13.7			11.5
	EA*4X60*21A*	*9MV*1002120A**	46000	TDR&TXV	13.7			11.5
	EA*4X60*21A*	*9MX*0802120A**	46000	TDR&TXV	13.7			11.3
	EA*4X60*21A*	*9MX*1002120A**	46000	TDR&TXV	13.7			11.5
	EA*4X60*21A*	*9MA*1002120A**	45500	TDR&TXV	13.7			11.4
	EA*4X60*21A*	*9MV*1002116A**	46000	TDR&TXV	13.5			11.2
	EA*4X60*21A*	*9MX*1002116A**	45500	TDR&TXV	13.5			11.2
	EA*4X60*21A*		46500	TXV		13		11
	EA*4X60*24A*	*8MV*1102120**	46000	TDR&TXV	13.7			11.5
	EA*4X60*24A*	*8MV*1352422**	46000	TDR&TXV	13.7			11.7
	EA*4X60*24A*	*8MX*0902116**	46000	TDR&TXV	13.7			11.5
	EA*4X60*24A*	*8MX*1102120**	46000	TDR&TXV	14			11.7
	EA*4X60*24A*	*8MX*1352420**	46000	TDR&TXV	13.7			11.5
	EA*4X60*24A*	*9MA*0802120A**	45500	TDR&TXV	13.7			11.5
	EA*4X60*24A*	*9MA*1002122A**	46000	TDR&TXV	13.7			11.5
	EA*4X60*24A*	*9MA*1202422A**	45500	TDR&TXV	14			11.5
	EA*4X60*24A*	*9MAC0602120A**	45500	TDR&TXV	13.5			11.3
	EA*4X60*24A*	*9MV*0802120A**	46000	TDR&TXV	13.7			11.5
	EA*4X60*24A*	*9MV*1002120A**	46000	TDR&TXV	13.7			11.5
	EA*4X60*24A*	*9MV*1202422A**	46000	TDR&TXV	13.7			11.4
	EA*4X60*24A*	*9MX*0802120A**	46000	TDR&TXV	13.7			11.3
	EA*4X60*24A*	*9MX*1002120A**	46000	TDR&TXV	13.7			11.5
	EA*4X60*24A*	*9MX*1202422A**	46000	TDR&TXV	13.7			11.4
	EA*4X60*24A*	*9MA*1002120A**	45500	TDR&TXV	13.7			11.4
	EA*4X60*24A*	*9MV*1002116A**	46000	TDR&TXV	13.5			11.2
	EA*4X60*24A*	*9MX*1002116A**	46000	TDR&TXV	13.5			11.2
	EA*4X60*24A*		46500	TXV		13		11
	EHD4X48A**	*8MV*0901716**	45500	TDR&TXV	13.5			11
	EHD4X48A**	*8MV*1102120**	45500	TDR&TXV	13.5			11
	EHD4X48A**	*8MV*1352422**	45500	TDR&TXV	13.9			11.5
	EHD4X48A**	*8MX*0902116**	45500	TDR&TXV	13.5			11
	EHD4X48A**	*8MX*1102120**	45500	TDR&TXV	14			11.5
	EHD4X48A**	*8MX*1352420**	45500	TDR&TXV	13.5			11
	EHD4X48A**	*9MA*0802120A**	45000	TDR&TXV	13.5			11.3
	EHD4X48A**	*9MA*1002122A**	45500	TDR&TXV	13.5			11.3
	EHD4X48A**	*9MA*1202422A**	45000	TDR&TXV	13.7			11.4
	EHD4X48A**	*9MAC0602120A**	45000	TDR&TXV	13.2			11.2
	EHD4X48A**	*9MV*0801716A**	45000	TDR&TXV	13.3			11
	EHD4X48A**	*9MV*0802120A**	45500	TDR&TXV	13.5			11.3
	EHD4X48A**	*9MV*1002120A**	45500	TDR&TXV	13.5			11.3
	EHD4X48A**	*9MV*1202422A**	45500	TDR&TXV	13.7			11.4
	EHD4X48A**	*9MX*0802120A**	45500	TDR&TXV	13.5			11.3
	EHD4X48A**	*9MX*1002120A**	45500	TDR&TXV	13.5			11.3
	EHD4X48A**	*9MX*1202422A**	45500	TDR&TXV	13.7			11.4
	EHD4X48A**	MV16J22**B*	45000	TDR&TXV	14			12

COOLING PERFORMANCE FOR COMBINATION RATINGS Indoor Models

For complete ratings information, use the AHRI website directory search: www.AHRIdirectory.org.
 New ratings may be listed online before Specification Sheets are updated.

MODEL	INDOOR MODEL	FURNACE MODEL	AHRI STANDARD RATINGS					
			COOLING					
			CAPACITY BTU/hr	Factory Installed	SEER			EER
STANDARD	TDR	TXV						
R4A348AKA R4A348GKA	EHD4X48A**	MV20L24**B*	45000	TDR&TXV	14			12
	EHD4X48A**	NOMV156E19*	45500	TDR&TXV	13.5			11
	EHD4X48A**	*9MA*1002120A**	45000	TDR&TXV	13.5			11.2
	EHD4X48A**	*9MV*1002116A**	45500	TDR&TXV	13.3			11
	EHD4X48A**	*9MX*1002116A**	45000	TDR&TXV	13.3			11
	EHD4X48A**		46000	TXV		13		11
	EHD4X60A**	*8MV*0901716**	45500	TDR&TXV	14			11.5
	EHD4X60A**	*8MV*1102120**	46000	TDR&TXV	14			11.5
	EHD4X60A**	*8MV*1352422**	46000	TDR&TXV	14.3			12
	EHD4X60A**	*8MX*0902116**	46000	TDR&TXV	14			11.5
	EHD4X60A**	*8MX*1102120**	46000	TDR&TXV	14.35			12
	EHD4X60A**	*8MX*1352420**	46000	TDR&TXV	14			11.5
	EHD4X60A**	*9MA*0802120A**	45500	TDR&TXV	13.7			11.5
	EHD4X60A**	*9MA*1002122A**	46000	TDR&TXV	14			11.7
	EHD4X60A**	*9MA*1202422A**	46000	TDR&TXV	14			11.5
	EHD4X60A**	*9MAC0602120A**	45500	TDR&TXV	13.5			11.3
	EHD4X60A**	*9MV*0801716A**	46000	TDR&TXV	13.3			11
	EHD4X60A**	*9MV*0802120A**	46000	TDR&TXV	13.7			11.5
	EHD4X60A**	*9MV*1002120A**	46000	TDR&TXV	14			11.5
	EHD4X60A**	*9MV*1202422A**	46000	TDR&TXV	14			11.5
	EHD4X60A**	*9MX*0801716A**	46000	TDR&TXV	13.3			11
	EHD4X60A**	*9MX*0802120A**	46500	TDR&TXV	13.7			11.5
	EHD4X60A**	*9MX*1002120A**	46500	TDR&TXV	13.7			11.5
	EHD4X60A**	*9MX*1202422A**	46500	TDR&TXV	14			11.5
	EHD4X60A**	MV16J22**B*	45000	TDR&TXV	14			12
	EHD4X60A**	MV20L24**B*	45000	TDR&TXV	14			12
	EHD4X60A**	NOMV156E19*	46000	TDR&TXV	13.95			11.5
	EHD4X60A**	*9MA*1002120A**	45500	TDR&TXV	13.7			11.4
	EHD4X60A**	*9MV*1002116A**	46000	TDR&TXV	13.5			11.2
	EHD4X60A**	*9MX*1002116A**	46000	TDR&TXV	13.5			11.2
	EHD4X60A**		46000	TXV		13		11
	EMA4X48D**		45000	TXV		13		11
	EN(A,D)4X48*24**	*8MV*1102120**	45000	TDR&TXV	13.5			11
	EN(A,D)4X48*24**	*8MV*1352422**	45000	TDR&TXV	13.95			11.5
	EN(A,D)4X48*24**	*8MX*0902116**	45500	TDR&TXV	13.5			11
	EN(A,D)4X48*24**	*8MX*1102120**	45500	TDR&TXV	14			11.5
	EN(A,D)4X48*24**	*8MX*1352420**	45500	TDR&TXV	13.5			11
	EN(A,D)4X48*24**	*9MA*0802120A**	44500	TDR&TXV	13.5			11.3
	EN(A,D)4X48*24**	*9MA*1002122A**	45000	TDR&TXV	13.5			11.3
	EN(A,D)4X48*24**	*9MA*1202422A**	44500	TDR&TXV	13.7			11.4
	EN(A,D)4X48*24**	*9MAC0602120A**	44500	TDR&TXV	13.2			11.2
	EN(A,D)4X48*24**	*9MV*0802120A**	45000	TDR&TXV	13.5			11.3
	EN(A,D)4X48*24**	*9MV*1002120A**	45000	TDR&TXV	13.5			11.3
	EN(A,D)4X48*24**	*9MV*1202422A**	45000	TDR&TXV	13.7			11.4
	EN(A,D)4X48*24**	*9MX*0802120A**	45000	TDR&TXV	13.2			11.2

COOLING PERFORMANCE FOR COMBINATION RATINGS Indoor Models

For complete ratings information, use the AHRI website directory search: www.AHRIdirectory.org.
 New ratings may be listed online before Specification Sheets are updated.

MODEL	INDOOR MODEL	FURNACE MODEL	AHRI STANDARD RATINGS					
			COOLING					
			CAPACITY BTU/hr	Factory Installed	SEER			EER
STANDARD	TDR	TXV						
R4A348AKA R4A348GKA	EN(A,D)4X48*24**	*9MX*1002120A**	45000	TDR&TXV	13.5			11.3
	EN(A,D)4X48*24**	*9MX*1202422A**	45000	TDR&TXV	13.7			11.4
	EN(A,D)4X48*24**	MV16J22**B*	45500	TDR&TXV	14.3			12
	EN(A,D)4X48*24**	MV20L24**B*	45500	TDR&TXV	14.3			12
	EN(A,D)4X48*24**	NOMV156E19*	45000	TDR&TXV	13.5			11
	EN(A,D)4X48*24**	*9MA*1002120A**	44500	TDR&TXV	13.5			11.2
	EN(A,D)4X48*24**	*9MV*1002116A**	45000	TDR&TXV	13			11
	EN(A,D)4X48*24**	*9MX*1002116A**	45000	TDR&TXV	13.3			11
	EN(A,D)4X48*24**		45500	TXV		13		11
	EN(A,D)4X61*24**	*8MV*1102120**	46000	TDR&TXV	14			11.5
	EN(A,D)4X61*24**	*8MV*1352422**	46000	TDR&TXV	14.4			12
	EN(A,D)4X61*24**	*8MX*0902116**	46000	TDR&TXV	14			11.5
	EN(A,D)4X61*24**	*8MX*1102120**	46000	TDR&TXV	14.45			12
	EN(A,D)4X61*24**	*8MX*1352420**	46000	TDR&TXV	14			11.5
	EN(A,D)4X61*24**	*9MA*0802120A**	46000	TDR&TXV	14			11.7
	EN(A,D)4X61*24**	*9MA*1002122A**	46500	TDR&TXV	14			11.7
	EN(A,D)4X61*24**	*9MA*1202422A**	46000	TDR&TXV	14.2			11.8
	EN(A,D)4X61*24**	*9MAC0602120A**	45500	TDR&TXV	13.7			11.3
	EN(A,D)4X61*24**	*9MV*0802120A**	46500	TDR&TXV	14			11.5
	EN(A,D)4X61*24**	*9MV*1002120A**	46500	TDR&TXV	14			11.7
	EN(A,D)4X61*24**	*9MV*1202422A**	46000	TDR&TXV	14.2			11.8
	EN(A,D)4X61*24**	*9MX*0802120A**	46500	TDR&TXV	13.7			11.5
	EN(A,D)4X61*24**	*9MX*1002120A**	46500	TDR&TXV	14			11.7
	EN(A,D)4X61*24**	*9MX*1202422A**	46500	TDR&TXV	14			11.5
	EN(A,D)4X61*24**	MV16J22**B*	46000	TDR&TXV	14.5			12
	EN(A,D)4X61*24**	MV20L24**B*	46000	TDR&TXV	14.5			12
	EN(A,D)4X61*24**	NOMV156E19*	46000	TDR&TXV	14			11.5
	EN(A,D)4X61*24**	*9MA*1002120A**	46000	TDR&TXV	13.7			11.4
	EN(A,D)4X61*24**	*9MV*1002116A**	46000	TDR&TXV	13.7			11.4
	EN(A,D)4X61*24**	*9MX*1002116A**	46500	TDR&TXV	13.7			11.4
	EN(A,D)4X61*24**		46000	TXV		13		11
	EN(A,D,W)4X48*21**	*8MV*0901716**	45000	TDR&TXV	13			11
	EN(A,D,W)4X48*21**	*8MV*1102120**	45000	TDR&TXV	13.5			11
	EN(A,D,W)4X48*21**	*8MX*0902116**	45500	TDR&TXV	13.5			11
	EN(A,D,W)4X48*21**	*8MX*1102120**	45500	TDR&TXV	14			11.5
	EN(A,D,W)4X48*21**	*9MA*0802120A**	44500	TDR&TXV	13.5			11.3
	EN(A,D,W)4X48*21**	*9MA*1002122A**	45000	TDR&TXV	13.5			11.3
	EN(A,D,W)4X48*21**	*9MAC0602120A**	44500	TDR&TXV	13.2			11.2
	EN(A,D,W)4X48*21**	*9MV*0801716A**	45000	TDR&TXV	13			11
	EN(A,D,W)4X48*21**	*9MV*0802120A**	45000	TDR&TXV	13.5			11.3
	EN(A,D,W)4X48*21**	*9MV*1002120A**	45000	TDR&TXV	13.5			11.3
	EN(A,D,W)4X48*21**	*9MX*0801716A**	45000	TDR&TXV	13			11
EN(A,D,W)4X48*21**	*9MX*0802120A**	45000	TDR&TXV	13.2			11.2	
EN(A,D,W)4X48*21**	*9MX*1002120A**	45000	TDR&TXV	13.5			11.3	
EN(A,D,W)4X48*21**	NOMV156E19*	45000	TDR&TXV	13			11	
EN(A,D,W)4X48*21**	*9MA*1002120A**	44500	TDR&TXV	13.5			11.2	
EN(A,D,W)4X48*21**	*9MV*1002116A**	45000	TDR&TXV	13			11	
EN(A,D,W)4X48*21**	*9MX*1002116A**	45000	TDR&TXV	13.3			11	
EN(A,D,W)4X48*21**		45500	TXV		13		11	
EN(A,D,W)4X60*24**	*8MV*1102120**	46000	TDR&TXV	14			11.5	

COOLING PERFORMANCE FOR COMBINATION RATINGS Indoor Models

For complete ratings information, use the AHRI website directory search: www.AHRIdirectory.org.
 New ratings may be listed online before Specification Sheets are updated.

MODEL	INDOOR MODEL	FURNACE MODEL	AHRI STANDARD RATINGS					
			COOLING					
			CAPACITY BTU/hr	Factory Installed	SEER			EER
STANDARD	TDR	TXV						
R4A348AKA R4A348GKA	EN(A,D,W)4X60*24**	*8MV*1352422**	46000	TDR&TXV	14			11.5
	EN(A,D,W)4X60*24**	*8MX*0902116**	46000	TDR&TXV	13.95			11.5
	EN(A,D,W)4X60*24**	*8MX*1102120**	46000	TDR&TXV	14			11.5
	EN(A,D,W)4X60*24**	*8MX*1352420**	46000	TDR&TXV	14			11.5
	EN(A,D,W)4X60*24**	*9MA*0802120A**	45500	TDR&TXV	13.7			11.5
	EN(A,D,W)4X60*24**	*9MA*1002122A**	46000	TDR&TXV	13.7			11.5
	EN(A,D,W)4X60*24**	*9MA*1202422A**	45500	TDR&TXV	14			11.5
	EN(A,D,W)4X60*24**	*9MAC0602120A**	45000	TDR&TXV	13.5			11.3
	EN(A,D,W)4X60*24**	*9MV*0802120A**	46000	TDR&TXV	13.7			11.5
	EN(A,D,W)4X60*24**	*9MV*1002120A**	46000	TDR&TXV	13.7			11.5
	EN(A,D,W)4X60*24**	*9MV*1202422A**	46000	TDR&TXV	13.7			11.4
	EN(A,D,W)4X60*24**	*9MX*0802120A**	46000	TDR&TXV	13.7			11.3
	EN(A,D,W)4X60*24**	*9MX*1002120A**	46000	TDR&TXV	13.7			11.5
	EN(A,D,W)4X60*24**	*9MX*1202422A**	46000	TDR&TXV	13.7			11.4
	EN(A,D,W)4X60*24**	MV16J22**B*	46000	TDR&TXV	14.5			12
	EN(A,D,W)4X60*24**	MV20L24**B*	46000	TDR&TXV	14.5			12
	EN(A,D,W)4X60*24**	NOMV156E19*	46000	TDR&TXV	13.9			11.5
	EN(A,D,W)4X60*24**	*9MA*1002120A**	45500	TDR&TXV	13.7			11.4
	EN(A,D,W)4X60*24**	*9MV*1002116A**	46000	TDR&TXV	13.5			11.2
	EN(A,D,W)4X60*24**	*9MX*1002116A**	45500	TDR&TXV	13.5			11.2
	EN(A,D,W)4X60*24**		46000	TXV		13		11
	ENH4X48*21**	*8MV*0901716**	45000	TDR&TXV	13.5			11
	ENH4X48*21**	*8MV*1102120**	45000	TDR&TXV	13.5			11
	ENH4X48*21**	*8MV*1352422**	45000	TDR&TXV	13.95			11.5
	ENH4X48*21**	*8MX*0902116**	45500	TDR&TXV	13.5			11
	ENH4X48*21**	*8MX*1102120**	45500	TDR&TXV	14			11.5
	ENH4X48*21**	*8MX*1352420**	45500	TDR&TXV	13.8			11.5
	ENH4X48*21**	*9MA*0802120A**	44500	TDR&TXV	13.5			11.3
	ENH4X48*21**	*9MA*1002122A**	45000	TDR&TXV	13.5			11.3
	ENH4X48*21**	*9MA*1202422A**	44500	TDR&TXV	13.7			11.4
	ENH4X48*21**	*9MAC0602120A**	44500	TDR&TXV	13.2			11.2
	ENH4X48*21**	*9MV*0801716A**	45000	TDR&TXV	13			11
	ENH4X48*21**	*9MV*0802120A**	45000	TDR&TXV	13.5			11.3
	ENH4X48*21**	*9MV*1002120A**	45000	TDR&TXV	13.5			11.3
	ENH4X48*21**	*9MV*1202422A**	45000	TDR&TXV	13.7			11.4
	ENH4X48*21**	*9MX*0801716A**	45000	TDR&TXV	13			11
	ENH4X48*21**	*9MX*0802120A**	45000	TDR&TXV	13.2			11.2
	ENH4X48*21**	*9MX*1002120A**	45000	TDR&TXV	13.5			11.3
	ENH4X48*21**	*9MX*1202422A**	45000	TDR&TXV	13.7			11.4
	ENH4X48*21**	MV16J22**B*	45500	TDR&TXV	14.3			12
	ENH4X48*21**	MV20L24**B*	45500	TDR&TXV	14.3			12
	ENH4X48*21**	NOMV156E19*	45000	TDR&TXV	13.5			11
	ENH4X48*21**	*9MA*1002120A**	44500	TDR&TXV	13.5			11.2
	ENH4X48*21**	*9MV*1002116A**	45000	TDR&TXV	13			11
	ENH4X48*21**	*9MX*1002116A**	45000	TDR&TXV	13.3			11
	ENH4X48*21**		45500	TXV		13		11
	ENH4X60*24**	*8MV*0901716**	46000	TDR&TXV	13.95			11.5
	ENH4X60*24**	*8MV*1102120**	46000	TDR&TXV	14			11.5
	ENH4X60*24**	*8MV*1352422**	46000	TDR&TXV	14			11.5

COOLING PERFORMANCE FOR COMBINATION RATINGS Indoor Models

For complete ratings information, use the AHRI website directory search: www.AHRIdirectory.org.
 New ratings may be listed online before Specification Sheets are updated.

MODEL	INDOOR MODEL	FURNACE MODEL	AHRI STANDARD RATINGS					
			COOLING					
			CAPACITY BTU/hr	Factory Installed	SEER			EER
STANDARD	TDR	TXV						
R4A348AKA R4A348GKA	ENH4X60*24**	*8MX*0902116**	46000	TDR&TXV	13.95			11.5
	ENH4X60*24**	*8MX*1102120**	46000	TDR&TXV	14			11.5
	ENH4X60*24**	*8MX*1352420**	46000	TDR&TXV	14			11.5
	ENH4X60*24**	*9MA*0802120A**	45500	TDR&TXV	13.7			11.5
	ENH4X60*24**	*9MA*1002122A**	46000	TDR&TXV	13.7			11.5
	ENH4X60*24**	*9MA*1202422A**	45500	TDR&TXV	14			11.5
	ENH4X60*24**	*9MAC0602120A**	45000	TDR&TXV	13.5			11.3
	ENH4X60*24**	*9MV*0801716A**	45500	TDR&TXV	13.3			11
	ENH4X60*24**	*9MV*0802120A**	46000	TDR&TXV	13.7			11.5
	ENH4X60*24**	*9MV*1002120A**	46000	TDR&TXV	13.7			11.5
	ENH4X60*24**	*9MV*1202422A**	46000	TDR&TXV	13.7			11.4
	ENH4X60*24**	*9MX*0801716A**	45500	TDR&TXV	13.3			11
	ENH4X60*24**	*9MX*0802120A**	46000	TDR&TXV	13.7			11.3
	ENH4X60*24**	*9MX*1002120A**	46000	TDR&TXV	13.7			11.5
	ENH4X60*24**	*9MX*1202422A**	46000	TDR&TXV	13.7			11.4
	ENH4X60*24**	MV16J22**B*	46000	TDR&TXV	14.5			12
	ENH4X60*24**	MV20L24**B*	46000	TDR&TXV	14.5			12
	ENH4X60*24**	NOMV156E19*	46000	TDR&TXV	13.9			11.5
	ENH4X60*24**	*9MA*1002120A**	45500	TDR&TXV	13.7			11.4
	ENH4X60*24**	*9MV*1002116A**	46000	TDR&TXV	13.5			11.2
	ENH4X60*24**	*9MX*1002116A**	45500	TDR&TXV	13.5			11.2
	ENH4X60*24**		46000	TXV		13		11
	ENH4X61*24**	*8MV*0901716**	46000	TDR&TXV	13.9			11.5
	ENH4X61*24**	*8MV*1102120**	46000	TDR&TXV	14			11.5
	ENH4X61*24**	*8MV*1352422**	46000	TDR&TXV	14			11.5
	ENH4X61*24**	*8MX*0902116**	46000	TDR&TXV	13.95			11.5
	ENH4X61*24**	*8MX*1102120**	46000	TDR&TXV	14			11.5
	ENH4X61*24**	*8MX*1352420**	46000	TDR&TXV	14			11.5
	ENH4X61*24**	*9MA*0802120A**	45500	TDR&TXV	13.7			11.5
	ENH4X61*24**	*9MA*1002122A**	46000	TDR&TXV	14			11.5
	ENH4X61*24**	*9MA*1202422A**	45500	TDR&TXV	14			11.5
	ENH4X61*24**	*9MAC0602120A**	45500	TDR&TXV	13.5			11.3
	ENH4X61*24**	*9MV*0801716A**	45500	TDR&TXV	13.5			11.2
ENH4X61*24**	*9MV*0802120A**	46000	TDR&TXV	13.7			11.5	
ENH4X61*24**	*9MV*1002120A**	46000	TDR&TXV	13.7			11.5	
ENH4X61*24**	*9MV*1202422A**	46000	TDR&TXV	14			11.5	
ENH4X61*24**	*9MX*0802120A**	46000	TDR&TXV	13.7			11.5	
ENH4X61*24**	*9MX*1002120A**	46000	TDR&TXV	13.7			11.5	
ENH4X61*24**	*9MX*1202422A**	46000	TDR&TXV	13.7			11.4	
ENH4X61*24**	MV16J22**B*	46000	TDR&TXV	14.5			12	
ENH4X61*24**	MV20L24**B*	46000	TDR&TXV	14.5			12	
ENH4X61*24**	NOMV156E19*	46000	TDR&TXV	13.85			11.5	
ENH4X61*24**	*9MA*1002120A**	45500	TDR&TXV	13.7			11.4	
ENH4X61*24**	*9MV*1002116A**	45500	TDR&TXV	13.7			11.4	
ENH4X61*24**	*9MX*1002116A**	46000	TDR&TXV	13.5			11.2	
ENH4X61*24**		46000	TXV		13		11	

* Tested Combo

COOLING PERFORMANCE FOR COMBINATION RATINGS Indoor Models

For complete ratings information, use the AHRI website directory search: www.AHRIdirectory.org.
New ratings may be listed online before Specification Sheets are updated.

MODEL	INDOOR MODEL	FURNACE MODEL	AHRI STANDARD RATINGS				
			COOLING				
			CAPACITY BTU/hr	Factory Installed	SEER		EER
STANDARD	TDR						
R4A360AKA	*ED*4X60L**		57000	TXV		13	11
R4A360GKA	FEM4X60****		57000	TDR&TXV	13.5		11.5
	FS(M,U)4X60****		57000	TDR&TXV	12.95		10.8
	FVM4X60****		57000	TDR&TXV	13.5		11.5
	FXM4X60**A*		57500	TDR&TXV	13.5		11
	EA*4X60*21A*	*8MV*1102120**	56500	TDR&TXV	13		11
	EA*4X60*21A*	*8MX*1102120**	56500	TDR&TXV	13.2		11.2
	EA*4X60*21A*	*9MA*1002122A**	56500	TDR&TXV	13.2		11
	EA*4X60*21A*	*9MV*1002120A**	56500	TDR&TXV	13		11
	EA*4X60*21A*	*9MX*0802120A**	56000	TDR&TXV	13.2		11
	EA*4X60*21A*		56500	TXV		13	11
	EA*4X60*24A*	*8MV*1102120**	56500	TDR&TXV	13.2		11
	EA*4X60*24A*	*8MV*1352422**	56500	TDR&TXV	13.5		11.2
	EA*4X60*24A*	*8MX*1102120**	56500	TDR&TXV	13.5		11.2
	EA*4X60*24A*	*8MX*1352420**	56500	TDR&TXV	13.2		11.2
	EA*4X60*24A*	*9MA*0802120A**	56000	TDR&TXV	13		11
	EA*4X60*24A*	*9MA*1002122A**	56500	TDR&TXV	13.2		11.2
	EA*4X60*24A*	*9MA*1202422A**	56500	TDR&TXV	13		11
	EA*4X60*24A*	*9MV*1002120A**	56500	TDR&TXV	13.2		11
	EA*4X60*24A*	*9MV*1202422A**	56500	TDR&TXV	13		11
	EA*4X60*24A*	*9MX*0802120A**	56500	TDR&TXV	13.2		11
	EA*4X60*24A*	*9MX*1002120A**	56500	TDR&TXV	13		11
	EA*4X60*24A*	*9MX*1202422A**	56500	TDR&TXV	13		11
	EA*4X60*24A*		57500	TXV		13	11
	EHD4X60A**	*8MV*1102120**	57000	TDR&TXV	13		11
	EHD4X60A**	*8MV*1352422**	57000	TDR&TXV	13.5		11
	EHD4X60A**	*8MX*1102120**	57000	TDR&TXV	13.5		11
	EHD4X60A**	*8MX*1352420**	57000	TDR&TXV	13		11
	EHD4X60A**	*9MA*0802120A**	56500	TDR&TXV	13.2		11.2
	EHD4X60A**	*9MA*1002122A**	57000	TDR&TXV	13.2		11.2
	EHD4X60A**	*9MA*1202422A**	56500	TDR&TXV	13.3		11
	EHD4X60A**	*9MV*1002120A**	57000	TDR&TXV	13.2		11
	EHD4X60A**	*9MV*1202422A**	56500	TDR&TXV	13.3		11
	EHD4X60A**	*9MX*0802120A**	56500	TDR&TXV	13.2		11.2
	EHD4X60A**	*9MX*1002120A**	57000	TDR&TXV	13.2		11
	EHD4X60A**	*9MX*1202422A**	56500	TDR&TXV	13.3		11
	EHD4X60A**	MV16J22**B*	56000	TDR&TXV	13.5		11.5
	EHD4X60A**	MV20L24**B*	56000	TDR&TXV	13.5		11.5
	EHD4X60A**		57000	TXV		13	11
	EN(A,D)4X61*24**	*8MV*1102120**	57000	TDR&TXV	13		11
	EN(A,D)4X61*24**	*8MV*1352422**	57000	TDR&TXV	13.5		11
	EN(A,D)4X61*24**	*8MX*1102120**	57000	TDR&TXV	13.5		11
	EN(A,D)4X61*24**	*8MX*1352420**	57000	TDR&TXV	13.5		11
	EN(A,D)4X61*24**	*9MA*0802120A**	56500	TDR&TXV	13.2		11.2
	EN(A,D)4X61*24**	*9MA*1002122A**	57500	TDR&TXV	13.5		11.2
	EN(A,D)4X61*24**	*9MA*1202422A**	57000	TDR&TXV	13.3		11
	EN(A,D)4X61*24**	*9MV*1002120A**	57500	TDR&TXV	13.2		11.2
	EN(A,D)4X61*24**	*9MV*1202422A**	57000	TDR&TXV	13.3		11
	EN(A,D)4X61*24**	*9MX*0802120A**	57000	TDR&TXV	13.2		11.2
	EN(A,D)4X61*24**	*9MX*1002120A**	57500	TDR&TXV	13.2		11.2

COOLING PERFORMANCE FOR COMBINATION RATINGS Indoor Models

For complete ratings information, use the AHRI website directory search: www.AHRIdirectory.org.

New ratings may be listed online before Specification Sheets are updated.

MODEL	INDOOR MODEL	FURNACE MODEL	AHRI STANDARD RATINGS				
			COOLING				
			CAPACITY BTU/hr	Factory Installed	SEER		EER
STANDARD	TDR						
R4A360AKA	EN(A,D)4X61*24**	*9MX*1202422A**	57000	TDR&TXV	13.3		11
R4A360GKA	EN(A,D)4X61*24**	MV16J22**B*	57000	TDR&TXV	13.5		11
	EN(A,D)4X61*24**	MV20L24**B*	57000	TDR&TXV	13.5		11
	EN(A,D)4X61*24**		57000	TXV		13	11
	EN(A,D,W)4X60*24**	*8MV*1102120**	57000	TDR&TXV	13		11
	EN(A,D,W)4X60*24**	*8MV*1352422**	57000	TDR&TXV	13		11
	EN(A,D,W)4X60*24**	*8MX*1102120**	57000	TDR&TXV	13		11
	EN(A,D,W)4X60*24**	*8MX*1352420**	57000	TDR&TXV	13		11
	EN(A,D,W)4X60*24**	*9MA*0802120A**	56000	TDR&TXV	13.2		11
	EN(A,D,W)4X60*24**	*9MA*1002122A**	56500	TDR&TXV	13.2		11.2
	EN(A,D,W)4X60*24**	*9MA*1202422A**	56500	TDR&TXV	13		11
	EN(A,D,W)4X60*24**	*9MV*1002120A**	56500	TDR&TXV	13.2		11
	EN(A,D,W)4X60*24**	*9MV*1202422A**	56000	TDR&TXV	13.3		11
	EN(A,D,W)4X60*24**	*9MX*0802120A**	56000	TDR&TXV	13.2		11
	EN(A,D,W)4X60*24**	*9MX*1002120A**	56500	TDR&TXV	13		11
	EN(A,D,W)4X60*24**	*9MX*1202422A**	56500	TDR&TXV	13		11
	EN(A,D,W)4X60*24**	MV16J22**B*	57000	TDR&TXV	13.5		11
	EN(A,D,W)4X60*24**	MV20L24**B*	57000	TDR&TXV	13.5		11
	EN(A,D,W)4X60*24**		57000	TXV		13	11
	ENH4X60*24**	*8MV*1102120**	57000	TDR&TXV	13		11
	ENH4X60*24**	*8MV*1352422**	57000	TDR&TXV	13		11
	ENH4X60*24**	*8MX*1102120**	57000	TDR&TXV	13		11
	ENH4X60*24**	*8MX*1352420**	57000	TDR&TXV	13		11
	ENH4X60*24**	*9MA*0802120A**	56000	TDR&TXV	13.2		11
	ENH4X60*24**	*9MA*1002122A**	56500	TDR&TXV	13.2		11.2
	ENH4X60*24**	*9MA*1202422A**	56500	TDR&TXV	13		11
	ENH4X60*24**	*9MV*1002120A**	56500	TDR&TXV	13.2		11
	ENH4X60*24**	*9MV*1202422A**	56000	TDR&TXV	13.3		11
	ENH4X60*24**	*9MX*0802120A**	56000	TDR&TXV	13.2		11
	ENH4X60*24**	*9MX*1002120A**	56500	TDR&TXV	13		11
	ENH4X60*24**	*9MX*1202422A**	56500	TDR&TXV	13		11
ENH4X60*24**	MV16J22**B*	57000	TDR&TXV	13		11	
ENH4X60*24**	MV20L24**B*	57000	TDR&TXV	13		11	
ENH4X60*24**		57000	TXV		13	11	
ENH4X61*24**	*8MV*1102120**	57000	TDR&TXV	13		11	
ENH4X61*24**	*8MV*1352422**	57000	TDR&TXV	13		11	
ENH4X61*24**	*8MX*1102120**	57000	TDR&TXV	13		11	
ENH4X61*24**	*8MX*1352420**	57000	TDR&TXV	13		11	
ENH4X61*24**	*9MA*1002122A**	57000	TDR&TXV	13.2		11.2	
ENH4X61*24**	*9MA*1202422A**	56500	TDR&TXV	13		11	
ENH4X61*24**	*9MV*1002120A**	57000	TDR&TXV	13.2		11	
ENH4X61*24**	*9MV*1202422A**	56500	TDR&TXV	13.3		11	
ENH4X61*24**	*9MX*0802120A**	56500	TDR&TXV	13.2		11	
ENH4X61*24**	*9MX*1202422A**	56500	TDR&TXV	13		11	
ENH4X61*24**	MV16J22**B*	57000	TDR&TXV	13		11	
ENH4X61*24**	MV20L24**B*	57000	TDR&TXV	13.5		11	
ENH4X61*24**		57000	TXV		13	11	

* Tested Combo

ACCESSORY USAGE GUIDELINES		
Accessory	REQUIRED FOR LOW-AMBIENT APPLICATIONS {Below 55°F (13°C)}	REQUIRED FOR LONG-LINE APPLICATIONS* {Over 80 Ft.(24.4m)}
Crankcase Heater	Yes	Yes
Evaporator Freeze Thermostat	Yes	No
Winter Start Control	Yes **	No
Hard Start Kit (Capacitor & Relay)	Yes	Yes
Low Ambient Kit (Pressure Switch)	Yes	No
Support Feet, 4" (102mm) tall	Recommended	No
Liquid Line Solenoid Valve	No	See Long-Line Application Guideline

* For Line Set lengths between 80 and 200 ft (24.4 and 61m) horizontal, or more than 20 ft (6.1m) indoor-outdoor vertical separation, refer to the Long Line Application Guideline document.

** Can only be installed in conjunction with Low Pressure Switch.

ACCESSORIES		
Part Number	Description	Used On Model Size
NASA003CH	Crankcase Heater for Compressor	18, 24, 30
NASA001CH	Crankcase Heater for Compressor	36, 42, 48, 60
NASA001SC	Start Component – PTC Device	ALL
NASA001FS	Evaporator Freeze Thermostat	ALL
NASA403PS	Low Pressure Switch	ALL
NASA404PS	High Pressure Switch	ALL
NASA001LS	Liquid Line Solenoid Valve	ALL
NASA001TD	Time Delay Relay, Indoor Blower	ALL
NASA001WS	Winter Start Control	ALL
NASA001AC	Anti-Cycle Timer (5 minute delay)	ALL
NASA401LA	Low Ambient Kit (Pressure Switch)	ALL
NASA001SF	Support Feet, 4" (102mm) tall	ALL
NASA003SC	Hard Start Kit (Capacitor & Relay)	18, 24, 36, 42, 48
NASA005SC	Hard Start Kit (Capacitor & Relay)	30, 60
NASA001SJ	Sound Jacket, Compressor	18, 24, 30, 36, 42, 48
NASA003SJ	Sound Jacket, Compressor	60
NAEA40501TX	TXV Kit, R-410A – 2010 and later Piston Coils	18, 24, 30
NAEA40601TX	TXV Kit, R-410A – 2010 and later Piston Coils	36, 42
NAEA40701TX	TXV Kit, R-410A – 2010 and later Piston Coils	48, 60
EBAC05TXVX	TXV Kit, R-410A – 2005–2009 R-22 TXV Fancoils (air handlers)	18, 24, 30
EBAC06TXVX	TXV Kit, R-410A – 2005–2009 R-22 TXV Fancoils (air handlers)	36, 42
EBAC07TXVX	TXV Kit, R-410A – 2005–2009 R-22 TXV Fancoils (air handlers)	48, 60

International Comfort Products, LLC
Lewisburg, Tennessee 37091 USA